





Self-Propelled **LIBERTY**

11-15 m³

| Compact power for small herds

LIBERTY Technical Specifications

A	Specifications	Liberty 11	Liberty 12	Liberty 13	Liberty 14	Liberty 15	Liberty 13XL	Liberty 14XL	
1	Volume [cu. mt.]	11	12	13	14	15	13	14	
2	Max Load [kg]	4400	4800	5200	5600	6000	5200	5600	
3	Engine H.P	135							
4	4 cylinders Engine	Deutz							
5	Overall Length [mm]	6750	6650		6865		6840		
6	Overall Height [mm]	2535	2678	2828	2900	3000	2828		
7	Overall Width [mm]	2250					2400		
8	Chopper Width [mm]	1784				1840	1784		
9	Chopper Dia. [mm]	600							
10	Chopper Height [mm]	3589	4070		3650		4070		
11	Loading Elevator Belt [mm]	500							
12	Discharge Height [mm]	460							
13	Wheel Dia. [mm]	940							
14	Wheel Base [mm]	2740							
15	Steering Radius [mm]	5713							
16	Ground Clearance [mm]	320							
17	Rear Steering	Yes							
18	Driving Speed [KPH]	12/24							
19	No. of STD Choper Knives	60							
20	No. of STD Mixer Knives	9					8		
21	Bin Wall Thickness [mm]	4							
22	Mixer Segment Thickness [mm]	12 / 14							
23	Mixer Speed [rpm]	15-44							
24	Elevated Cab.	No							
25	3CR12 Option	Bin, Augers, Chopper, Loader Elevation							

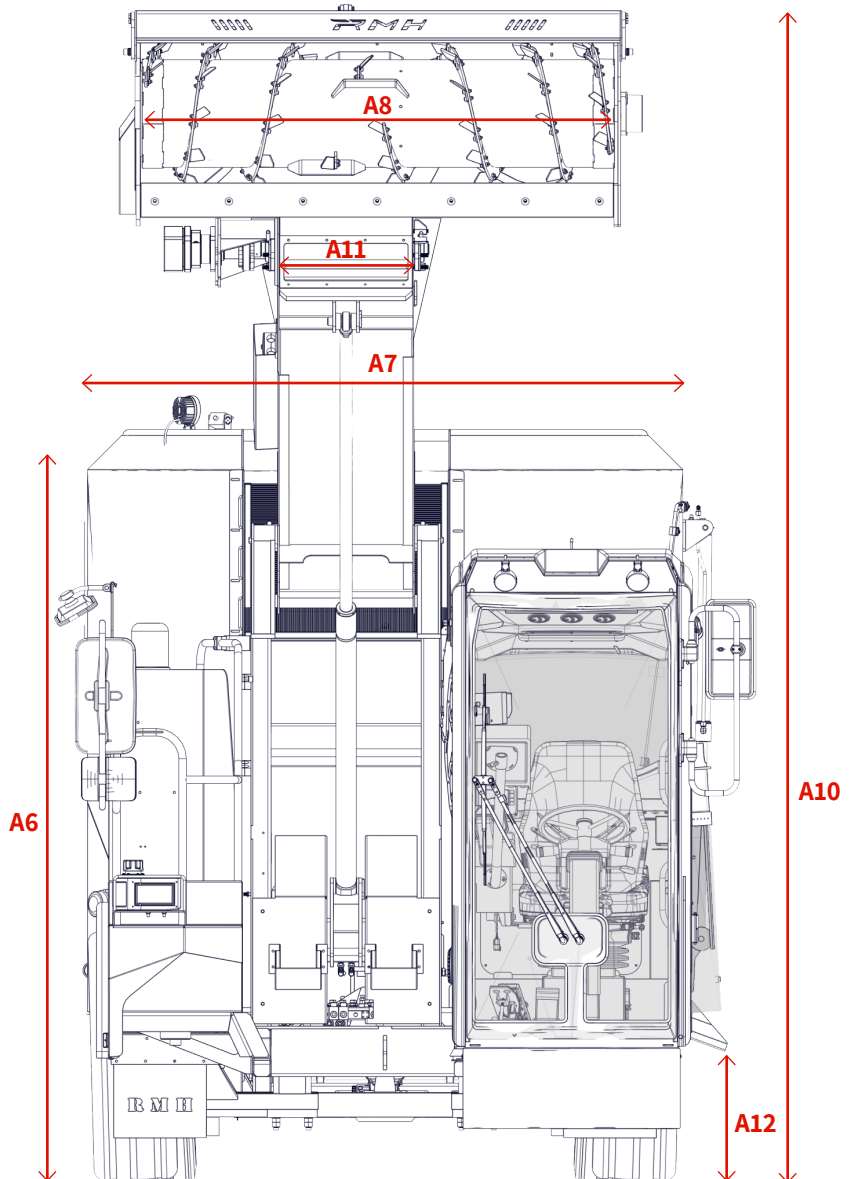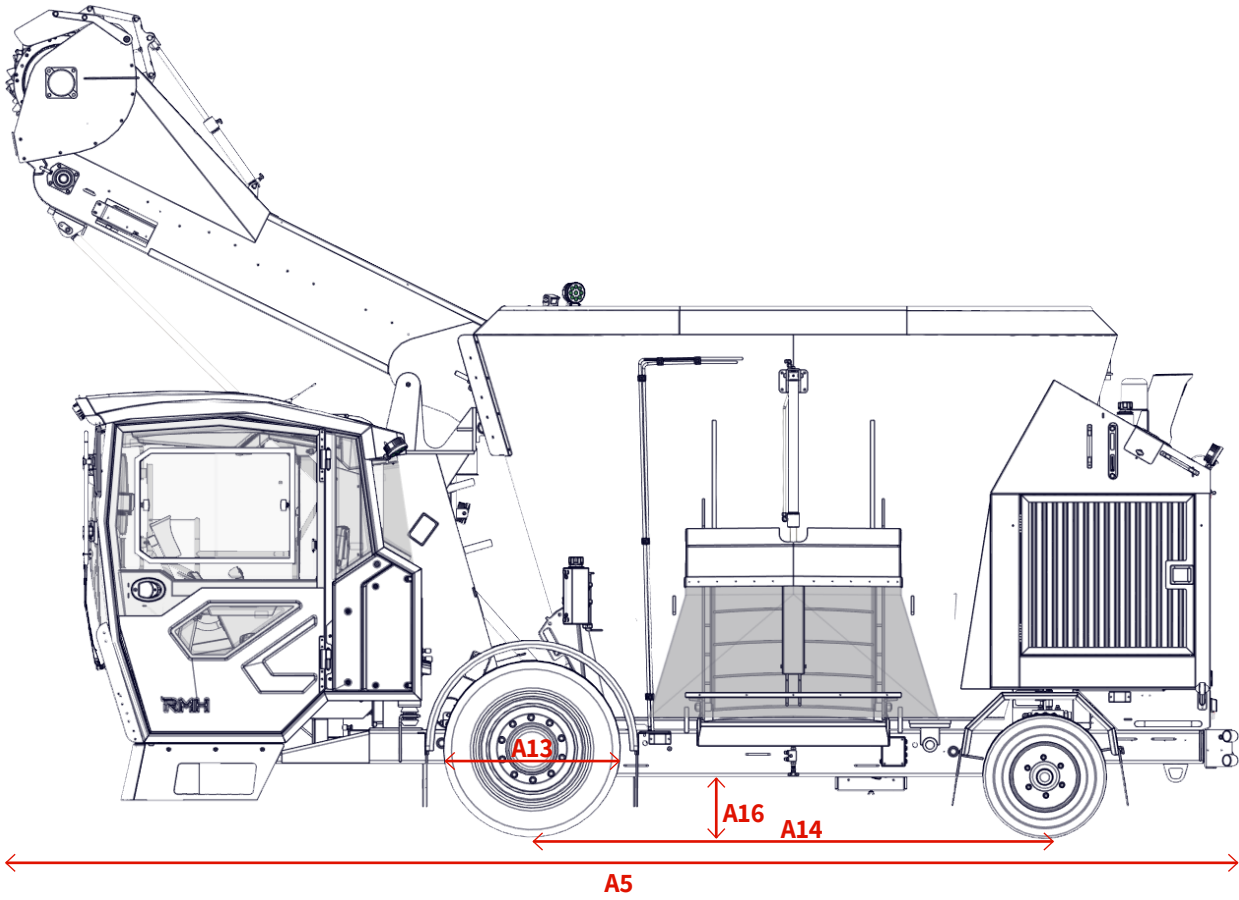



Mixing since 1956



Follow Us

BROliberty27042026



Tailored to
You



Comfort
Every Day



With You for Life



Profitable by
Design



Peace of Mind

Volume Model	11	12	13	14	15	16	17	18	19	20	21	22	24	26	28	30	36	
LIBERTY																		
DELTA V																		
VSL																		
VULCAN																		
PREMIUM																		
TURBOMIX																		
TRIPLE																		

ABOUT RMH

For over 70 years, RMH has led the way in self-propelled mixing technology. Our mission is to provide innovative, efficient, and reliable solutions that help livestock producers feed better, work smarter, and grow stronger.



In the event of any inconsistency between the English version and any translation, the English version shall prevail. Specifications, configurations, and dimensions are subject to change without notice and may vary based on product customization.