

Working Together For A Shared Future



Official website

NOBLELIFT CHINA

Add:528 Changzhou Road, Taihu Sub-district,
Changxing, Zhejiang 313100 China
Tel:86-572-6210817 6210311
Fax:86-572-6210777 6128612
Email: info@noblelift.com
Http: www.noblelift.com www.noblelift.cn

NOBLELIFT NORTH AMERICA

Add:2461 S Wolf Road Des Plaines, IL 60018
Tel:001-847-595-7100
Fax:001-847-595-7200
Email: sales@nobleliftna.com
Http: www.nobleliftna.com

NOBLELIFT RUSSIA

ООО «Ноблелифт Рус», 195067, Санкт-Петербург
пр. Маршала Блюхера, д. 78, литер Б
Тел.: +7-800-700-28-97
Email: sales@noblelift.com.ru
Http: www.noblelift.com.ru

NOBLELIFT EUROPE GMBH

Add:Noblelift Europe GmbH Werner-von-SiemenStrasse,
1224568, Kaltenkirchen Germany
Tel:+49 9401 607930
Fax:+49 9401 6079329
Email:mail@noblelifteurope.com
Http:www.noblelifteurope.com

NOBLELIFT

HPT20S-Li

WEIGHING SCALE PALLET TRUCK



**PALLET TRUCK WITH
WEIGHT INDICATUON**

NEW Noblelift Products
ARRIVAL

NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD

www.noblelift.com

HPT20S-Li



High Definition Display:

High definition of the LCD display. Display can be read from any angle and with backlight, it can be used in dark environment.

Totalising function:

Each batch of product can be weighed multiple times, and finally accumulated to a total weight for avoiding overload.

Unit Switching:

The unit of weight can be freely switched between lb and kg to meet different needs of customers.

Multiple function keys:

There are many function keys (including tare and gross weight), which can meet various weighing needs of customers.

Big function keys that “click”:

When pressing the function keys, the operator senses a “click” movement. Even when working with gloves, the operator feels whether he has pressed the key properly.

High Accuracy:


Maximum error 0.05% of four sensors with ultra-high consistency. Even if a load is placed out of centre or the floor conditions that are not optimal, the accuracy remains high.

Optional Printer:

Support external printer, you can convert the numerical data to paper label freely. Equipped with low voltage protection, even if the vehicle shakes, it will not affect the use of the printer.

Build-in Rechargeable Battery:

Built-in 5000mAh super-capacity rechargeable battery with the advantages of durability and convenient charging, without disassembly. It lasts 3 months on a single battery charge. and the operating current is only 1ma (on the premise that backlight and printer connection are turned off).

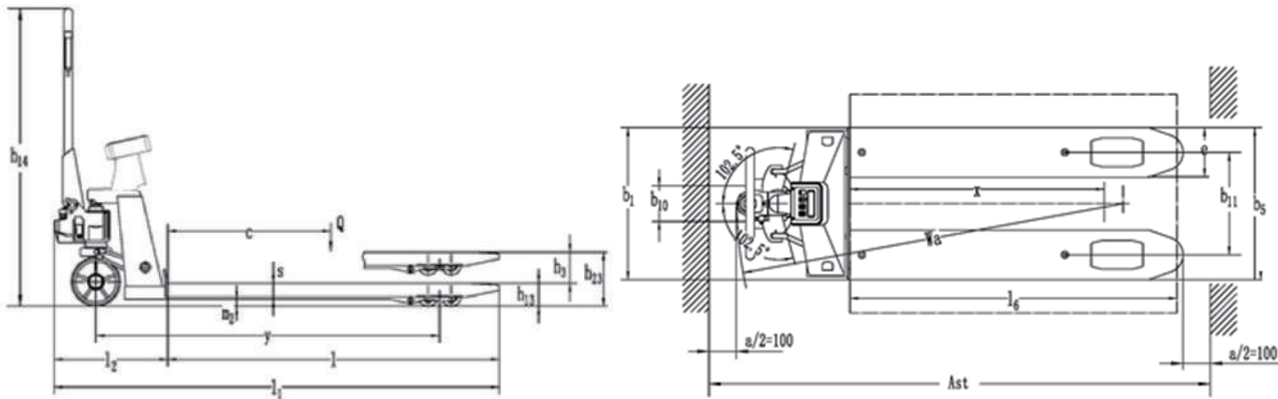

echnical Data in line with VDI 2198				
Identification				
1.2	Manufacturer`s type designation		HPT20S-Li	
1.4	Type of operation:(hand,pedestrian,standing,seated,order picker)		Manual	
1.5	Load capacity / rated load	Q (kg)	2000	
1.6	Load centre distance	c (mm)	600	620
1.8	Load distance ,centre of drive axle to fork	x (mm)	863	933
1.9	Wheelbase	y (mm)	1195	1265
Weight				
2.1	Service weight	kg	88	93
2.2	Axle loading, laden front/rear	kg	616 / 1478	665 / 1432
2.3	Axle loading, unladen front/rear	kg	62 / 32	64 / 33
Wheels Chassis				
3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		PU / Rubber / Nylon	
3.2	Tire size,front	Øxw (mm)	Ø 180×50	
3.3	Tire size,rear	Øxw (mm)	Ø 74×70/74×93	
3.5	Wheels,number front/rear(x=driven wheels)		2/2 or 2/4	
3.6	Track width, front	b10 (mm)	130	
3.7	Track width, rear	b11 (mm)	375 (510)	
Basic Dimensions				
4.4	Lift height	h3 (mm)	115	
4.9	Height of tiller in drive position min./ max.	h14 (mm)	1207	
4.14	Standing height, elevated	h23 (mm)	200	
4.15	Height, lowered	h13 (mm)	85	
4.19	Overall length	l1 (mm)	1569	1693
4.20	Length to face of forks	l2 (mm)	417	
4.21	Overall width	b1 (mm)	540/685	
4.22	Fork dimensions	s/e/l (mm)	50/160/ 1150	50/160/ 1220
4.25	Width over forks	b5 (mm)	540/685	
4.32	Ground clearance, centre of wheelbase	m2 (mm)	26	
4.33	Aisle width for pallets 1000×1200 crossways	Ast (mm)	1833	1903
4.34	Aisle width for pallets 800×1200 lengthways	Ast (mm)	1833	1903
4.35	Turning radius	Wa (mm)	1346	1416
Performance Data				
5.3	Lowering speed laden/unladen	m/s	0.01 / 0.06	
Display				
6.4	Battery voltage, nominal capacity K5	V / Ah	3.7V 5000mAh	