



Self-Propelled **TRIPLE**


30-36 m³

| Full capacity power for mega farms

TRIPLE Technical Specifications

A	Specifications	Triple 30	Triple 36
1	Volume [cu. mt.]	30	36
2	Max Load [kg]	12000	14400
3	Eco Engine H.P	286	340
4	Engine Manufacturer	Volvo	
5	Overall Length [mm]	10800	11000
6	Overall Height [mm]	3620	3700
7	Overall Width [mm]	2800	2990
8	Chopper Width [mm]	2014	2250
9	Chopper Dia. [mm]	600	
10	Chopper Height [mm]	6000	
11	Loading Elevator Belt [mm]	650	800
12	Discharge Height [mm]	810	
13	Wheel Dia. [mm]	1150	
14	Wheel Base [mm]	5840	6150
15	Steering Radius [mm]	7250	
16	Ground Clearance [mm]	275	
17	6 Wheel Steering	Yes	
18	Driving Speed [KPH]*	40	25
19	No. of STD Choper Knives	66	70
20	No. of STD Mixer Knives	15	16
21	3CR12 Bin Wall Thickness [mm]	6	
22	Mixer Segment Thickness [mm]	14/16	16
23	Mixer Speed [rpm]	15-50	
24	Elevated Cab.	Yes	
25	3CR12 Option	Augers, Chopper, Loading Elevator	

*Suitable for farms only

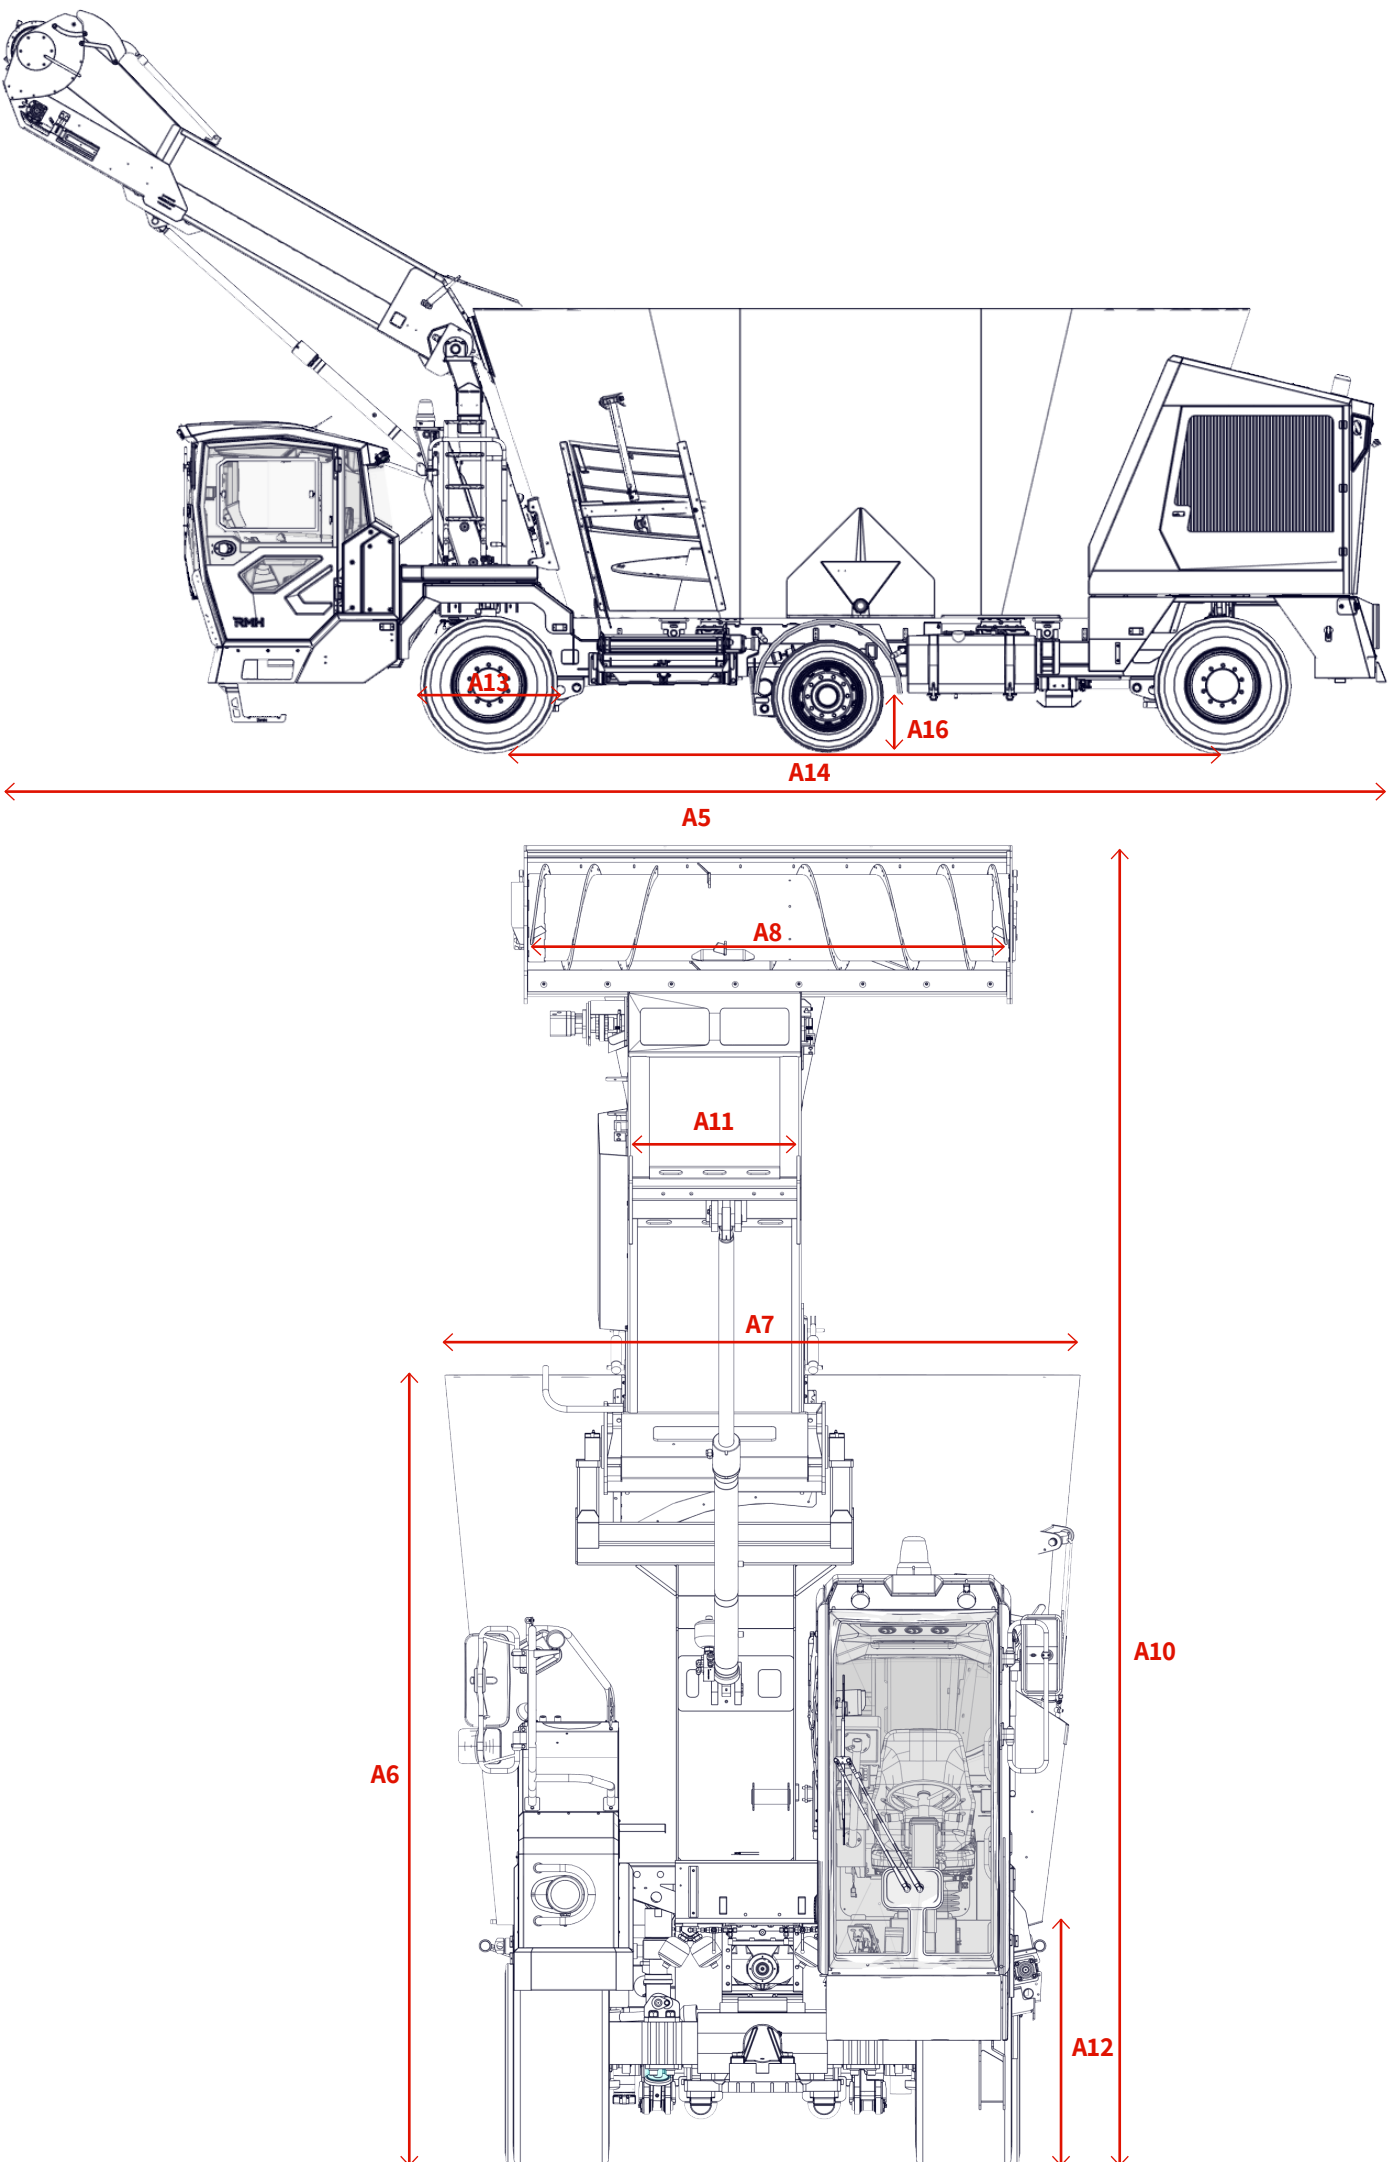



Mixing since 1956



Follow Us

BROtriple27042026



Tailored to
You



Comfort
Every Day



With You for Life



Profitable by
Design



Peace of Mind

Volume	11	12	13	14	15	16	17	18	19	20	21	22	24	26	28	30	36
Model																	
LIBERTY																	
DELTA V																	
VSL																	
VULCAN																	
PREMIUM																	
TURBOMIX																	
TRIPLE																	

ABOUT RMH

For over 70 years, RMH has led the way in self-propelled mixing technology. Our mission is to provide innovative, efficient, and reliable solutions that help livestock producers feed better, work smarter, and grow stronger.



In the event of any inconsistency between the English version and any translation, the English version shall prevail. Specifications, configurations, and dimensions are subject to change without notice and may vary based on product customization.