

Genie® QS-12, QS-15 & QS-20

Specifications

Models	QS-12		QS-15		QS-20	
Measurements	US	Metric	US	Metric	US	Metric
Working height max. - indoor ⁽¹⁾	17 ft 4 in	5.45 m	20 ft 8 in	6.47 m	25 ft 9 in	8.02 m
Working height max. - outdoor ⁽¹⁾	15 ft 1 in	4.80 m	17 ft 1 in	5.40 m	21 ft 6 in	6.70 m
Platform height max.- indoor	11 ft 4 in	3.45 m	14 ft 8 in	4.47 m	19 ft 9 in	6.02 m
Platform height max. - outdoor	9 ft 1 in	2.80 m	11 ft 1 in	3.40 m	15 ft 6 in	4.70 m
A B Platform (lengthxwidth), tray down	35x28.75 in	0.89x0.73 m	35x28.75 in	0.89x0.73 m	35x28.75 in	0.89x0.73 m
A B Platform (lengthxwidth), tray up	56x28.75 in	1.4x0.73 m	56x28.75 in	1.4x0.73 m	56x28.75 in	1.4x0.73 m
C Height - stowed	5 ft 10 in	1.78 m	5 ft 10 in	1.78 m	6 ft 6 in	1.98 m
D Length- stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	0.75 m	2 ft 5.5 in	0.75 m	2 ft 7.5 in	0.80 m
F Ground clearance (center)	2.5 in	6 cm	2.5 in	6 cm	2.5 in	6 cm

Productivity

Maximum platform occupancy (in/out)	1/1		1/1		1/1	
Lift capacity	500 lb	227 kg	500 lb	227 kg	350 lb	159 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability ⁽²⁾	30%		30%		30%	
Turning radius - inside/outside	0°		0°		0°	
Turning radius - outside	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 5 in	1.34 m
Lifting speed - raise/lower	20/18 sec		21/19 sec		24/21 sec	
Controls - proportional	24V DC		24V DC		24V DC	
Tires - Solid non-marking	10x3x8 in	25x8x20 cm	10x3x8 in	25x8x20 cm	10x3x8 in	25x8x20 cm
Tilt sensor activation (front to back/side to side)	3°/1.5°		3°/1.5°		3°/1.5°	

Power


Power	24V (4x6V 225Ah)		24V (4x6V 225Ah)		24V (4x6V 225Ah)	
Hydraulic tank capacity	2.2 gal	8.33L	2.2 gal	8.33L	2.2 gal	8.33L

Weight⁽³⁾ and Floor Loading⁽⁴⁾

Weight - Retail (R) configuration	1,628 lb	738 kg	2,236 lb	1,014 kg	2,553 lb	1,158 kg
Weight - Warehouse (W) configuration	1,600 lb	726 kg	2,208 lb	1,002 kg	2,525 lb	1,145 kg
Tire load max.	680 lb	308 kg	720 lb	327 kg	870 lb	395 kg
Tire contact pressure	721.3 KPa	104.6 psi	763.7 KPa	110.8 psi	922.8 KPa	133.8 psi
Occupied floor pressure	200.87 psf	9.6 kPa	251.99 psf	12.1 kPa	250.39 psf	12.0 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA		< 70 dBA		< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA		< 70 dBA		< 70 dBA	
Vibrations	< 8 ft 2 in/s ²	< 2.5 m/s ²	< 8 ft 2 in/s ²	< 2.5 m/s ²	< 8 ft 2 in/s ²	< 2.5 m/s ²

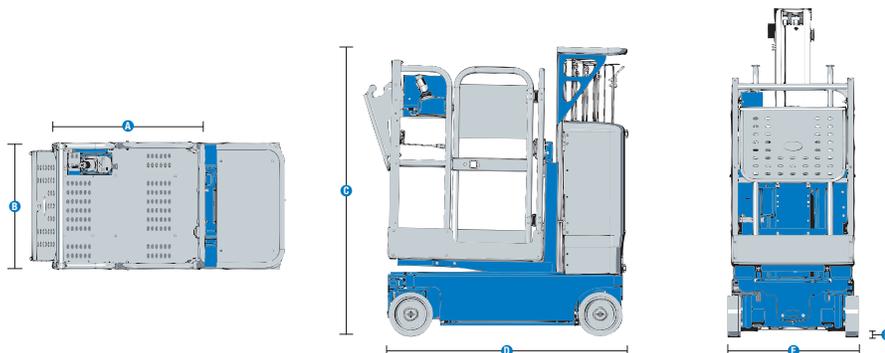

(1) The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(3) Weight refers to standard configuration and may vary depending on options and/or country standards.

(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® QS-12, QS-15 & QS-20

SKU: Standard Model

- QS-12R (Retail)*
- QS-15R (Retail)*
- QS-20R (Retail)*

* Build to Order

SKU: Standard Model

- QS-12W (Warehouse)*
- QS-15W (Warehouse)*
- QS-20W (Warehouse)*

Option availability		S	S+	BtO
Power	AGM maintenance-free batteries			✓
	EE-Certification			○
	Retractable Charging cord			○
	AC power to platform			✓
				✓
Platform	Stock Picker dual swing-gate entry platform			✓
	Adjustable front tray			○
	Lift Guard Contact Alarm			○
	Lift Tools Work Tray			○
	Platform bike rack			○
	Auxiliary platform lowering			✓
	Enclosed platform cables			✓
	Folding front tray			✓
	Overhead crane attachment point			✓
	Platform control guard			✓
	Platform load sense system			✓
	Proportional lift and drive			✓
	SmartLink dual zone control system			✓
				○
Chassis	Lift Connect Telematics			○
	Lift Connect with Access Manager upgrade			○
	Biodegradable hydraulic oil			○
	Drive cut-out while charging			○
	Descent, tilt, and motion alarm			✓
	Dual LED flashing beacons			✓
	Dual wheel multi-disc brakes			✓
	Hinged rear ABS covers for easy access			✓
	Hour meter			✓
	Hydraulic brake release			✓
	Large forklift pockets access			✓
	Obstruction sensing pad			✓
	On-board diagnostic system with battery charge indicator			✓
	Pothole protection			✓
	Solid non-marking tires			✓
	Tech Pro Link connector			✓
Tie-down attachment points			✓	

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options




Compact Footprint



Lightweight



Dual-Entry Platform

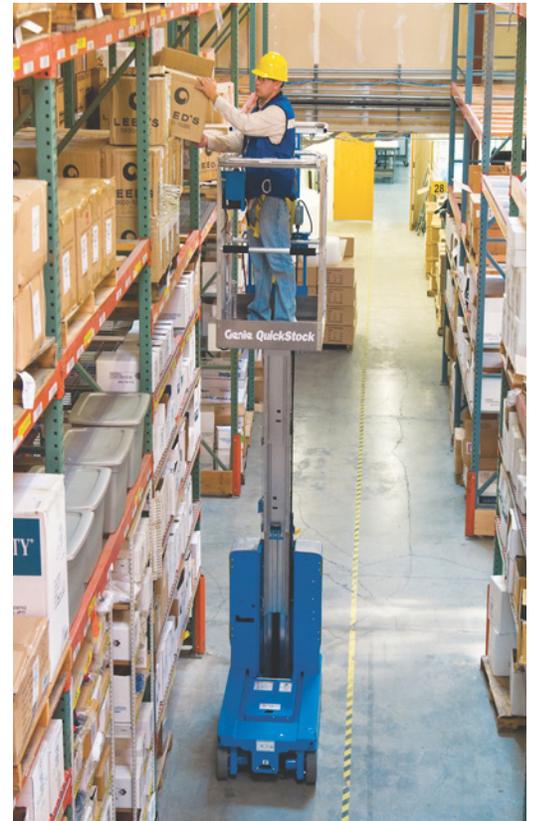

Genie Genuine Accessories⁽¹⁾

- Lift Guard secondary guarding systems
- Lift Tools productivity tools
- Lift Connect Telematics subscription extension
- Tech Pro Link Connector

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

Updated 11/21