




Self-Propelled **VULCAN**

14-20 m³

| Road-ready reliability, built tough

VULCAN Technical Specifications

A	Specifications	Vulcan 14	Vulcan 16	Vulcan 18	Vulcan 20
1	Volume [cu. mt.]	14	16	18	20
2	Max Load [kg]	5600	6400	7200	8000
3	Engine H.P	215 / 208			
4	Engine Manufacturer	Volvo/Deutz			
5	Overall Length [mm]	8240	8140	8620	8620
6	Overall Height [mm]	2900	3050	3250	3400
7	Overall Width [mm]	2500			
8	Chopper Width [mm]	2014			
9	Chopper Dia. [mm]	600			
10	Chopper Height [mm]	4510			
11	Loading Elevator Belt [mm]	650			
12	Discharge Height [mm]	757			
13	Wheel Dia. [mm]	1072			
14	Wheel Base [mm]	4550			
15	Steering Radius [mm]	5884			
16	Ground Clearance [mm]	240			
17	4 Wheel Steering	Yes			
18	Driving Speed [KPH]	25/40			
19	No. of STD Choper Knives	65			
20	No. of STD Mixer Knives	10/14			11/15
21	Bin Wall Thickness [mm]	8			
22	Mixer Segment Thickness [mm]	16			
23	Mixer Speed [rpm]	15-44			
24	Elevated Cab.	No			
25	3CR12 Option	Bin, Augers, Chopper, Loading Elevator			

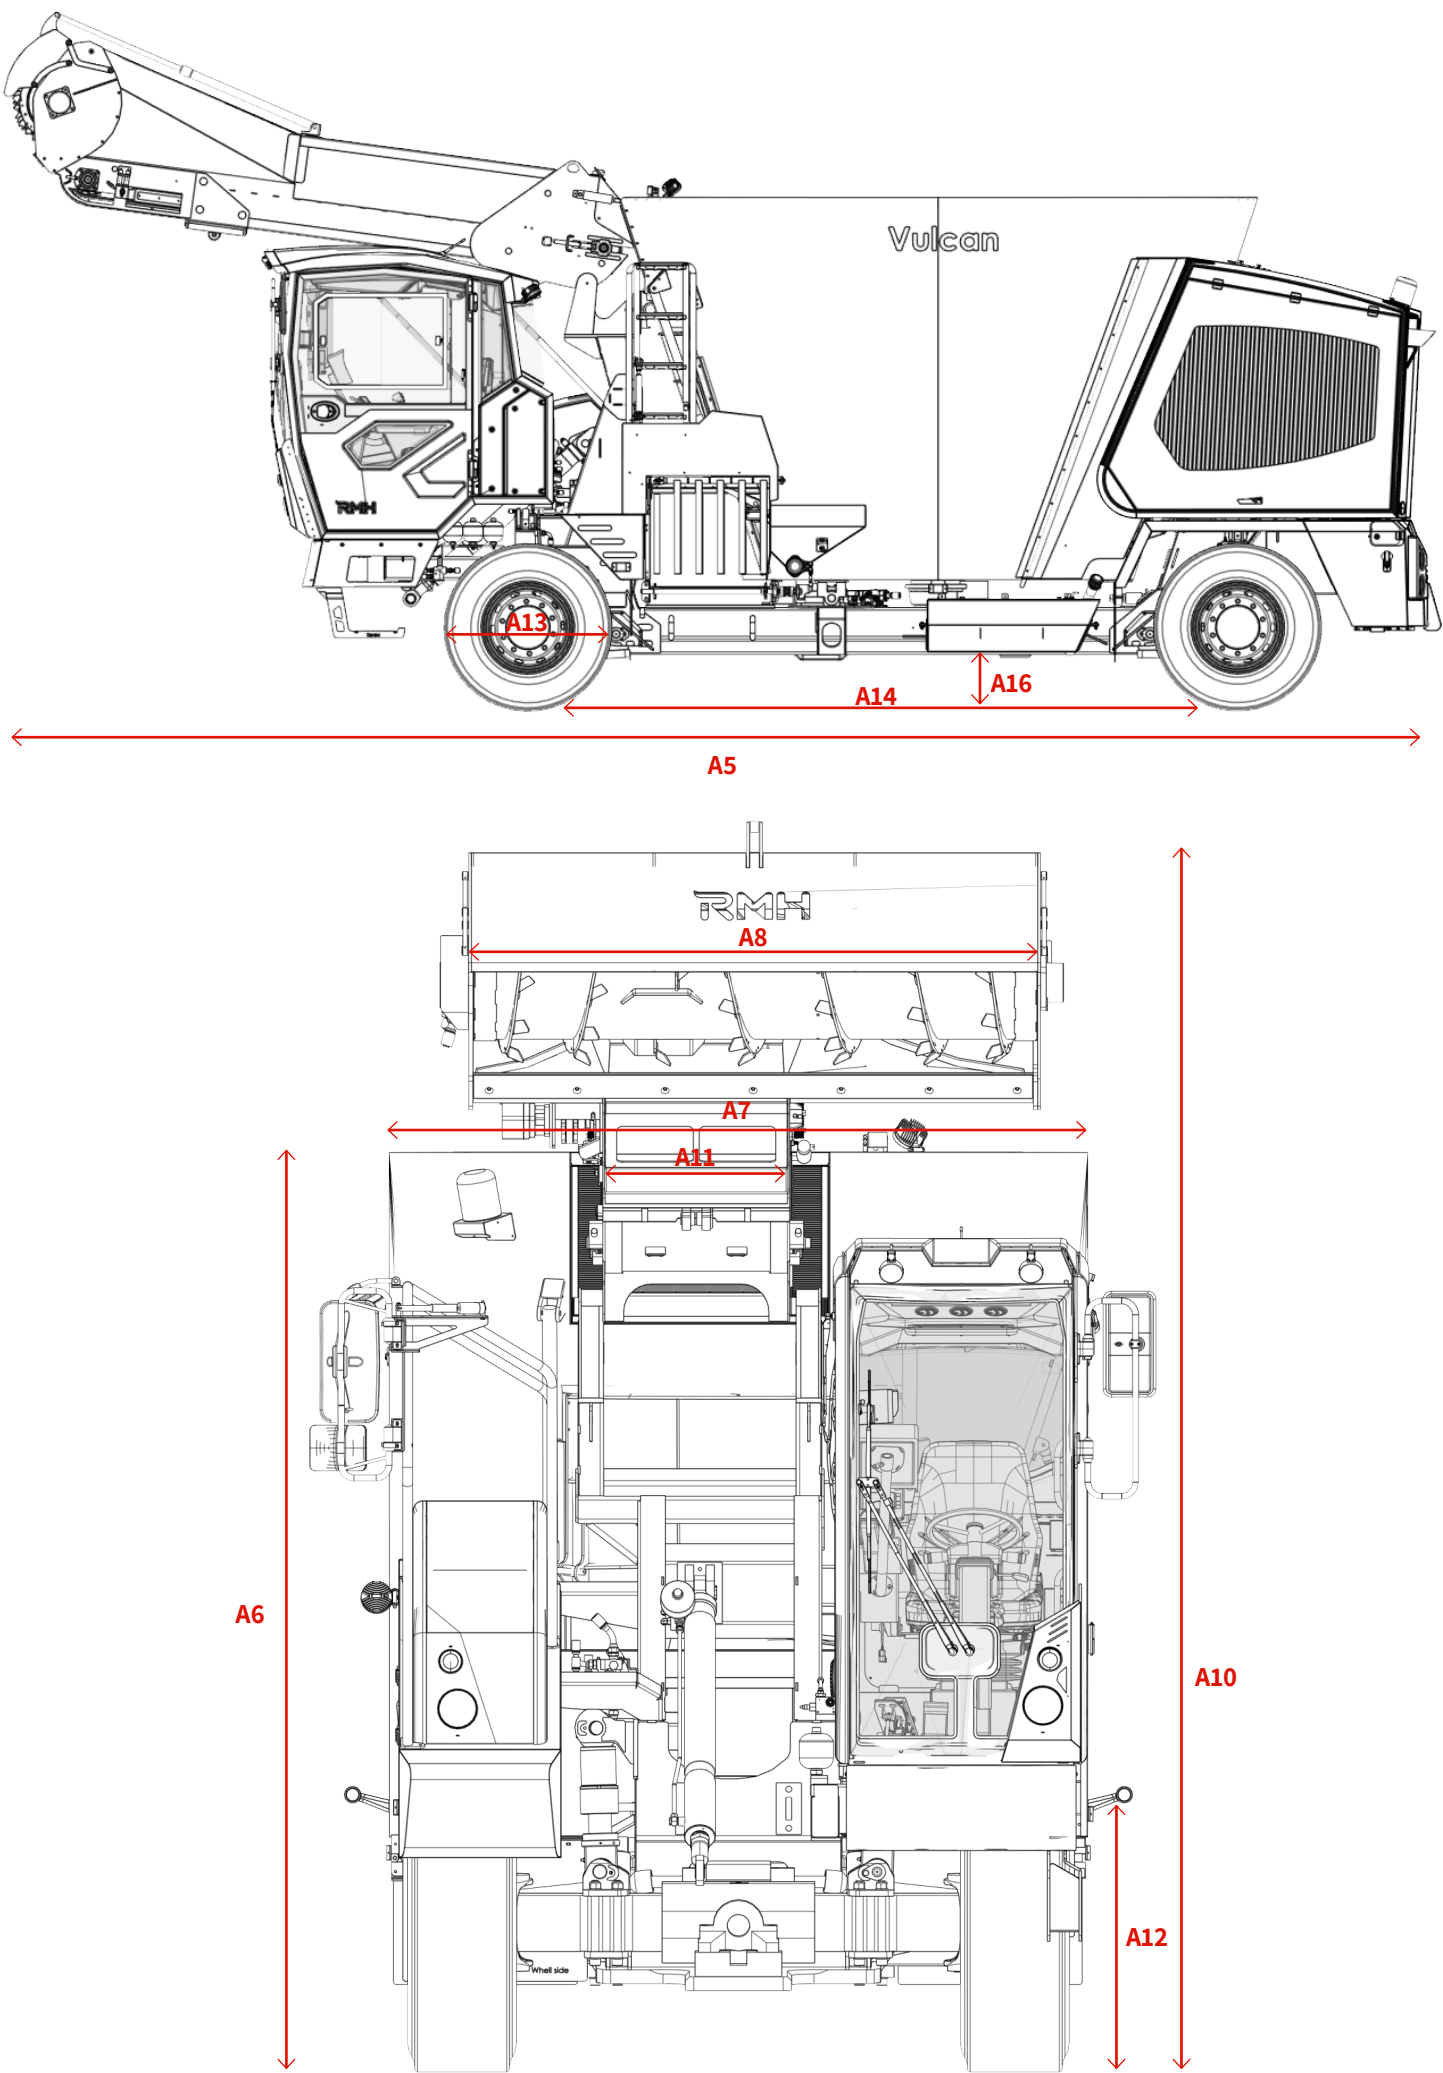



Mixing since 1956



Follow Us

BROvulcan27042026



Tailored to
You



Comfort
Every Day



With You for Life



Profitable by
Design



Peace of Mind

Volume Model	11	12	13	14	15	16	17	18	19	20	21	22	24	26	28	30	36	
LIBERTY																		
DELTA V																		
VSL																		
VULCAN																		
PREMIUM																		
TURBOMIX																		
TRIPLE																		

ABOUT RMH

For over 70 years, RMH has led the way in self-propelled mixing technology. Our mission is to provide innovative, efficient, and reliable solutions that help livestock producers feed better, work smarter, and grow stronger.



In the event of any inconsistency between the English version and any translation, the English version shall prevail. Specifications, configurations, and dimensions are subject to change without notice and may vary based on product customization.