



ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: No. 88, Donghuan Rd., Lin'an
Economic Development Zone, Zhejiang,
China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88132890 88926789

sales@hcforklift.com
www.hcforklift.com



2017 VERSION 2/COPYRIGHT 2017/07



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



X Series Diesel / Gasoline / LPG Counterbalanced Forklift Trucks

with capacities of 1,500 to 3,800kg

The World of Hangcha



X Series

Diesel / Gasoline / LPG
Counterbalanced
Forklift Trucks



Innovation design

The X series is the new series of internal combustion counterbalance forklift truck developed by Hangcha independently, adopting the world advanced technologies based on the original products. Through the comprehensive upgrading of appearance molding, energy conservation, environmental friendly, comfort, security and reliability, it will become the world-class forklift truck which can meet your overall demands.

Strong appearance and visual impact

The appearance of full truck is developed under the cooperation with professional industrial design company by adopting the appearance design methods of brand-new concept. The streamlined surface modeling design brings smooth lines, elegant appearance, vigorous and steady surface as well as the outstanding inherence, possessing the powerful visual impact.

The truck is small, exquisite and concise. which adopting the newly designed parts with opening mould at large area, the appearance of full vehicle will be more humanized.



The new designed mast increase forward visibility 15%



Noise ↓ 3dB



Legroom ↑ 30%



Aluminous plate-fin radiator provide better performance, water temp ↓ 10℃, oil temp ↓ 10%



Floating structure decrease the vibration by 10%



Exhaust emission ↓ 35%



Grade-speed ability ↑ 10%



High pressure common rail electronic-controlled engine provide lower failure rate



Prolong the service life of steering axle 20%



Fuel consumption ↓ 10%



Better cold starting performance

Energy conservation and Environmental friendly



The standard engine is the high pressure common rail electronic-controlled engine which adopts high pressure multiple injections technology to ensure the strong power take-off, lower emission and better cold starting performance; saving the 10% of energy consumption.



The whole truck adopts LED lights as shiner and new-type panoramic retroreflector to ensure energy conservation and power saving as well as greatly improve the performance and service life of luminaires at the same time.

The truck all adopt the environmental friendly material to reduce environmental hazards.

Maintenance

Integral locking pin structure on the hood can be opened without tool, which is convenient for daily repair and maintenance.



The enlarged opening angle of hood and increase of left and right hood side plates can provide you with convenient and rapid maintenance mode.



Adoption of new generation integrated electric box makes maintenance and repair convenient, layout becomes more reasonable and with better water-proof performance.



Newly-developed LCD instrument has more comprehensive functions and more stable performance and entirely displays the full truck state, fault code and other important information, which can make the operator more intuitively and conveniently have a better knowledge of truck state and make the maintenance conveniently.


Fully improved reliability And security



1. The radiator adopts aluminous plate-fin radiator with better performance and higher structural strength independent oil radiator, optimized oil and water heat dissipation channel and double ventilation holes on counterweight can greatly improve cooling efficiency and reliability of overloaded operation and ensure reliable operation of the engine.



2. 2.0~3.8t roller bearing on the steering axle king pin adopts large size tapered roller bearing (TRB), larger steering cylinder and bumper block assemblies on the top, which can prolong the service life of bearing and highly improve the reliability of steering axle.

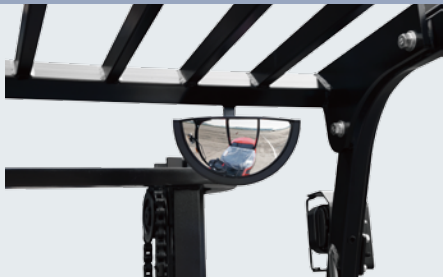


3. Overhead guard adopts special-shaped steel tube, which can reinforce the strength and improve sealing of the cab.
4. Optimized hydraulic breather structure and integrated with return oil filter can prolong the service life of hydraulic pressure system.




Comfort

Option of the most advanced full floating structure in the world can minimize the vibration of full truck and support more superior buffer, micro-motion and start-ing functions at the same time. With several imported engines, they can constitute more perfect engine-transmission system.

*Reduce the caster angle of instrument stand and adopt the integral hood to greatly increase the space underfoot;
The orthodrome of overhead guard fore leg will expand the driving space;*

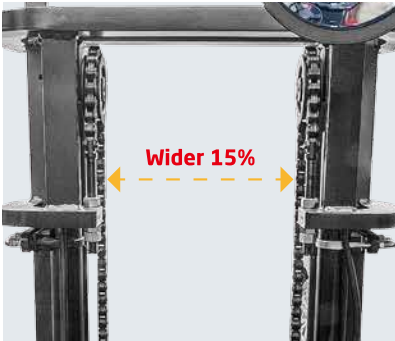

Adopt the new-type of box iron. Increase the inside width of inner mast and the spacing between lifting cylinders. The lowering of instru-ments in the cabin will greatly increase the forward visibility; The rear visibility will also be greatly improved through the optimization design of counterweight.

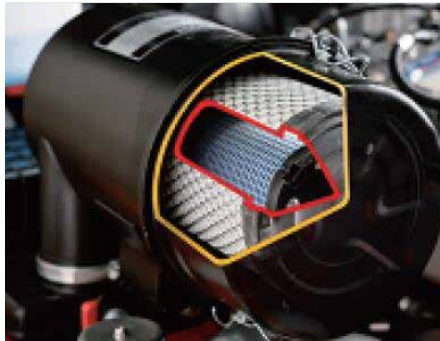

Optimized air intake and exhaust system, high-capacity exhaust silencer and high-effect intake muffler will reduce the noise of full truck by 3dB and reduce the vibration by 20%.



The design of steering wheel of small diameter and electro-hydraulic reversing as well as the car-type double-handle combination switch will greatly improve the driving comfort.

Intelligentized management system (option)

Reserved plug of extending function of Intelligent module is on the wire bundles that makes truck management more convenient and rapid.



Standard Specification

- / Cover of tilt cylinder
- / Traction device
- / LED working light
- / Hydraulic oil filter
- / Electric Flameout
- / Seat with belt
- / Skidproof pedal
- / Air filter
- / Hydraulic oil dipstick
- / Mast speed limiting valve
- / Full hydraulic power steering
- / Wide view duplex mast
- / Standard forks
- / Waterproof cover on the guard
- / Standard overhead guard
- / Rear combination LED light
- / Panoramic rearview mirror
- / Filf folder
- / Adjustable steering column
- / Pre-heating indicator
- / Engine fuel pressure warning
- / Neutral switch
- / Engine hood spring
- / Dipstick
- / Pneumatic tyres
- / Standard load backrest
- / Horn
- / Fuel gauge
- / LCD display
- / Cable parking brake
- / Tilt cylinder self-locking valve
- / Fork carriage mounting class II(III)
- / Timer
- / Load safety valve
- / Charging indicator
- / Water temperature gauge
- / Toolbox
- / Reversing buzzer
- / Return oil filter
- / Hand grip
- / Integrated controller
- / Oil-water separator
- / Engine fault warning
- / Rubber pedal
- / 2nd hydraulic function
- / Transmission oil temperature warning

Optional Mast

- / Duplex wide view full free mast
- / Trilex wide view full free mast
- / Special duplex wide view mast
- / Wider fork carriage
- / Special forks

Options



- / Dual driving wheel
- / Cabin
- / High-positioned exhaust system
- / Customer painting
- / Cabin heater
- / LED rear working light
- / Hood lock
- / Double heat insulating pad and leather cover
- / Net cover of radiator
- / Solid tyre
- / Non-mark tyre (white/green)
- / Middle-positioned exhaust system
- / Sparkle arrester
- / Suspension seat
- / Purified exhaust system
- / Fuel tank lock
- / Speed meter
- / Auxiliary hydraulic valve
- / Extinguisher
- / Reversing assist grip with horn button
- / Counter weight net
- / Height of overhead guard
- / Dual air filter
- / Milometer
- / Speed limiter (Electronic-Controlled engine)
- / Emergency switch
- / Fan protector
- / Over-speed alarm
- / Warning light
- / Dynamic load sensing system
- / OPS system

Optional Attachments

- / Paper roll clamp
- / Rotating bale clamp
- / Load stabilizer
- / Multi-drum clamp
- / Bale clamp
- / Drum clamp
- / Dumping clamp
- / Crane arm
- / String pole
- / Weigher system
- / Sideshifter
- / Rotating forks
- / Fork extensioner
- / Load release device
- / Carton clamp
- / Push-pull device
- / Bucket
- / Hook
- / Lengthened fork

X Series Diesel / Gasoline / LPG Counterbalanced Forklift Trucks

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.						
	1.2	Manufacturer's type designation		CPCD15-XRW10	CPCD18-XRW10	CPCD20-XRW56	CPCD25-XRW56	CPCD30-XRW56	CPCD35-XRW56	CPCD38-XRW56
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	Seated	Seated	Seated	Seated	Seated	Seated
	1.5	Rated capacity/rated load	Q (kg)	1500	1750	2000	2500	3000	3500	3800
	1.6	Load centre distance	c (mm)	500	500	500	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x (mm)	405	410	460	460	475	480	480
	1.9	Wheelbase	y (mm)	1475	1475	1650	1650	1700	1700	1700
	Weight	2.1	Service Weight	kg	2720	2880	3450	3850	4380	4750
2.2		Axle loading, laden front/rear	kg	3720/500	4110/520	4750/700	5540/810	6450/930	7200/1050	7650/1100
2.3		Axle loading, unladen front/rear	kg	1300/1420	1290/1590	1600/1850	1560/2290	1700/2680	1700/3050	1650/3300
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
	3.2	Tyre size, front		6.5-10-10PR	6.5-10-10PR	7.00-12-12PR	7.00-12-12PR	28*9-15-12PR	28*9-15-12PR	28*9-15-12PR
	3.3	Tyre size, rear		5.00-8-10PR	5.00-8-10PR	6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	3.5	Wheels, number front / rear (x = driven wheels)		2*/2	2*/2	2*/2	2*/2	2*/2	2*/2	2*/2
	3.6	Tread, front	b10 (mm)	890	890	965	965	1005	1005	1005
	3.7	Tread, rear	b11 (mm)	920	920	973	973	975	975	975
	Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/12	6/12	6/12	6/12	6/12	6/12
4.2		Height, mast lowered	h1 (mm)	1995	1995	1999	1999	2054	2169	2169
4.3		Free lift	h2 (mm)	155	155	160	160	165	170	170
4.4		Lift	h3 (mm)	3000	3000	3000	3000	3000	3000	3000
4.5		Height, mast extended	h4 (mm)	3955	3955	4045	4045	4140	4140	4140
4.7		Height of overhead guard (cabin)	h6 (mm)	2120(2220)	2120(2220)	2120(2220)	2120(2220)	2150(2250)	2150(2250)	2150(2250)
4.8		Seat height relating to SIP	h7 (mm)	1035	1035	1035	1035	1035	1035	1035
4.12		Coupling height	h10 (mm)	310	310	320	320	350	350	350
4.19		Overall length	l1 (mm)	3205	3240	3615	3680	3770	3850	3880
4.20		Length to face of forks	l2 (mm)	2285	2320	2540	2610	2700	2780	2810
4.21		Overall width	b1(mm)	1090	1090	1155	1155	1225	1225	1225
4.22		Fork dimensions	s/e/l (mm)	35×100×920	35×100×920	40×122×1070	40×122×1070	45×122×1070	50×122×1070	50×122×1070
4.23		Fork carriage DIN 15 173 --- ISO 2328, class/type A,B		Class A	Class A	Class A	Class A	Class A	Class A	Class A
4.24		Fork-carriage width	b3 (mm)	1000	1000	1038	1038	1100	1100	1100
4.25		Distance between fork-arms	b5 (mm)	226-970	226-970	252-1020	252-1020	272-1082	272-1082	272-1082
4.31		Ground clearance, laden, below mast	m1 (mm)	115	115	105	105	130	130	130
4.32		Ground clearance, centre of wheelbase	m2 (mm)	145	145	150	150	170	170	170
4.34.1		Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	3640	3670	3930	3990	4075	4120	4160
4.34.2		Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	3840	3870	4130	4190	4275	4320	4360
Performance data		4.35	Turning radius	Wa (mm)	2035	2060	2270	2330	2400	2440
	4.36	Internal turning radius	b13 (mm)	60	60	160	160	200	200	200
	5.1	Travel speed, laden/unladen	km/h	16.5/17.5	16.5/17.5	19/20	19/20	17/18	17/18	17/18
	5.2	Lift speed, laden/unladen	m/s	0.5/0.55	0.5/0.55	0.58/0.62	0.58/0.62	0.46/0.50	0.36/0.45	0.36/0.45
	5.3	Lowering speed, laden/unladen	m/s	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.45/0.50	0.35/0.40	0.35/0.40
	5.5	Drawbar pull, laden/unladen	N	17000/10500	17000/10500	18500/12500	18500/12500	23600/14500	23600/14500	23600/14000
	5.7	Gradeability, laden/unladen	%	25/25	25/25	20/25	20/25	20/25	20/20	20/20
	5.10	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
		Parking brake		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
	7.1	Engine manufacturer/type		ISUZU C240NKF01	ISUZU C240NKF01	YANMAR/ 4TNV94L-BXPHZ	YANMAR/ 4TNV94L-BXPHZ	YANMAR/ 4TNV94L-BXPHZ	YANMAR/ 4TNV94L-BXPHZ	YANMAR/ 4TNV94L-BXPHZ
Combustion-engine	7.2	Engine power	kW	35.4	35.4	34.6	34.6	34.6	34.6	34.6
	7.3	Rated speed	r/min	2500	2500	2400	2400	2400	2400	2400
	7.4	Number of cylinders/displacement	(-) / (cm³)	4/2369	4/2369	4/3054	4/3054	4/3054	4/3054	4/3054
	7.8	Generator	A	12	12	12	12	12	12	12
	7.9	Vehicle electrical system voltage	V	12	12	12	12	12	12	12
	7.10	Battery voltage/nominal capacity	V/Ah	12/90	12/90	12/90	12/90	12/90	12/90	12/90
		Rated torque	N·m/r/min	139.9/1800	139.9/1800	191.5 ~ 208.5/1500	191.5 ~ 208.5/1500	191.5 ~ 208.5/1500	191.5 ~ 208.5/1500	191.5 ~ 208.5/1500
		Transmissions Manufacturer		China	China	China	China	China	China	China
		Transmissions Type		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
		Stage FWD/RVS		1/1	1/1	1/1	1/1	1/1	1/1	1/1
Addition data	10.1	Operating pressure for attachments	bar	145	145	175	175	175	175	175
	10.2	Oil volume for attachments	l/min	40	40	60	60	60	60	60
	10.3	Hydraulic Tank - capacity (drain & refill)	liter	50	50	65	65	65	65	65
	10.4	Fuel tank capacity	liter	50	50	65	65	65	65	65
	10.7	Sound pressure level at the driver's seat	dB (A)	85	85	85	85	85	85	85

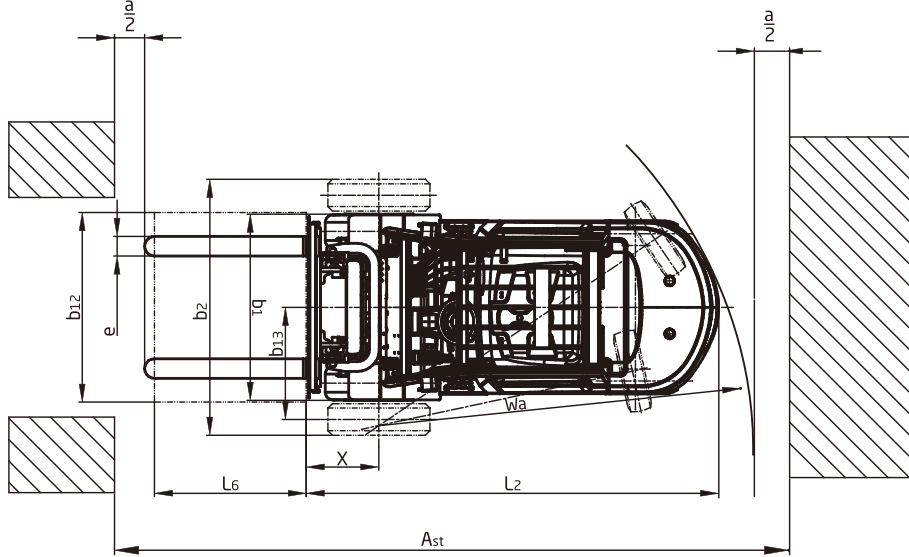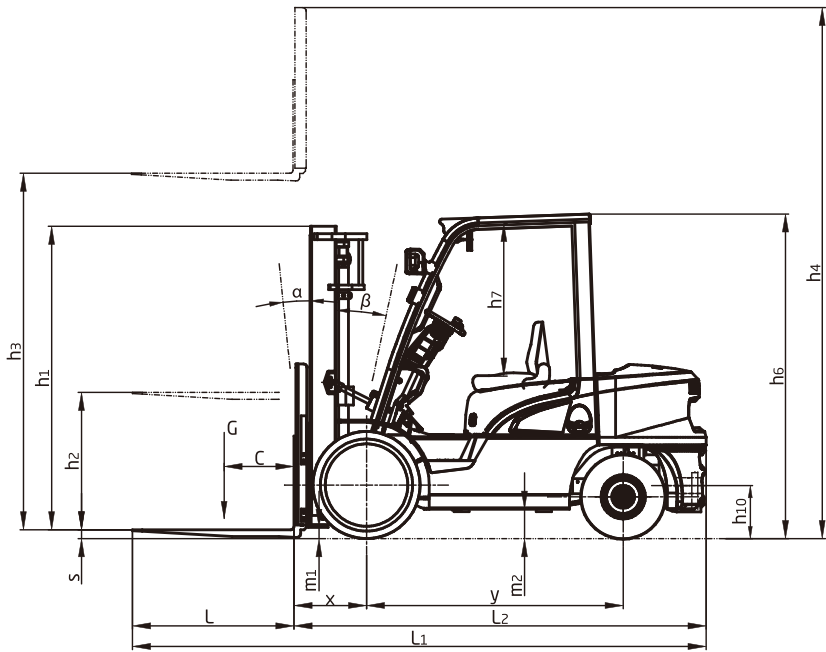

1.0-1.8t X series mast:(Pneumatic)

Type	Model	Max. fork height	Overall height			Free lift		Front Overhang		Tilt range	Capacity			
			Lowered	Extended		Without backrest	With backrest				Load capacity at 500mm			
				Without backrest	With backrest			Single tire				Dual tire		
								1.5t	1.75t		1.5t	1.75t		
													mm	mm
Wide view mast	XR15/18M200	2000	1495	2658	2955	155	155	405	410	6/6	1500	1500	1500	1750
	XR15/18M250	2500	1745	3158	3455	155	155	405	410	6/12	1500	1500	1500	1750
	XR15/18M270	2700	1845	3358	3655	155	155	405	410	6/12	1500	1500	1500	1750
	XR15/18M300	3000	1995	3658	3955	155	155	405	410	6/12	1500	1500	1500	1750
	XR15/18M330	3300	2145	3958	4255	155	155	405	410	6/12	1500	1500	1500	1750
	XR15/18M360	3600	2345	4258	4555	155	155	405	410	6/12	1500	1500	1500	1750
	XR15/18M400	4000	2595	4658	4955	155	155	405	410	6/6	1400	1650	1500	1750
	XR15/18M430	4300	2745	4958	5255	155	155	405	410	6/6	1300	1550	1400	1650
	XR15/18M450	4500	2845	5158	5455	155	155	405	410	6/6	1250	1450	1350	1550
	XR15/18M480	4800	2995	5458	5755	155	155	405	410	6/6	1100	1250	1200	1350
	XR15/18M500	5000	3095	5658	5955	155	155	405	410	6/6	1050	1150	1150	1250
Wide view full free duplex mast	XR15/18U250	2500	1760	3445	3184	1076	815	428	433	6/12	1500	1750	1500	1750
	XR15/18U270	2700	1860	3645	3384	1176	915	428	433	6/12	1500	1750	1500	1750
	XR15/18U300	3000	2010	3945	3684	1326	1065	428	433	6/12	1500	1750	1500	1750
	XR15/18U330	3300	2160	4245	3984	1476	1215	428	433	6/12	1500	1750	1500	1750
	XR15/18U360	3600	2310	4545	4284	1626	1365	428	433	6/12	1500	1750	1500	1750
Wide view full free triplex mast	XR15/18U400	4000	2560	4945	4684	1876	1615	428	433	6/12	1400	1650	1500	1750
	XR15/18N400	4000	1960	4694	4955	1276	1015	428	433	6/6	1300	1550	1400	1650
	XR15/18N430	4300	2060	4994	5255	1376	1115	445	450	6/6	1250	1450	1350	1550
	XR15/18N450	4500	2110	5194	5455	1426	1165	445	450	6/6	1200	1350	1300	1450
	XR15/18N480	4800	2260	5494	5755	1576	1315	445	450	6/6	1100	1250	1200	1350
	XR15/18N500	5000	2360	5694	5955	1676	1415	445	450	6/6	1050	1150	1150	1250
	XR15/18N550	5500	2560	6194	6455	1876	1615	445	450	3/6	/	/	950	1050
XR15/18N600	6000	2810	6694	6955	2126	1865	445	450	3/6	/	/	750	850	

With sideshifter minus 150Kg,with integral sideshifter minus 100kg.

2.0-2.5t X series mast:(Pneumatic)

Type	Model	Max. fork height	Overall height			Free lift		Front Overhang	Tilt range	Capacity			
			Lowered	Extended		Without backrest	With backrest			Load capacity at 500mm			
				Without backrest	With backrest					Single tire		Dual tire	
										2.0t	2.5t	2.0t	2.5t
		mm	mm	mm	mm	mm	mm	(°)	kg	kg	kg	kg	
Wide view mast	XR25M250	2500	1749	3207	3546	160	160	460	6/12	2000	2500	2000	2500
	XR25M270	2700	1849	3407	3746	160	160	460	6/12	2000	2500	2000	2500
	XR25M300	3000	1999	3707	4046	160	160	460	6/12	2000	2500	2000	2500
	XR25M330	3300	2149	4007	4346	160	160	460	6/12	2000	2500	2000	2500
	XR25M360	3600	2349	4307	4646	160	160	460	6/12	2000	2500	2000	2500
	XR25M400	4000	2599	4707	5046	160	160	460	6/6	1900	2300	2000	2500
	XR25M430	4300	2749	5007	5346	160	160	460	6/6	1800	2100	1950	2450
	XR25M450	4500	2849	5207	5546	160	160	460	6/6	1700	2000	1900	2400
	XR25M480	4800	2999	5507	5846	160	160	460	6/6	1500	1700	1700	2100
	XR25M500	5000	3099	5707	6046	160	160	460	6/6	1400	1600	1600	2500
Wide view full free duplex mast	XR25M550	5500	3349	6207	6546	160	160	460	3/6	1050	1200	1500	1800
	XR25M600	6000	3599	6707	7046	160	160	460	3/6	700	800	1400	1600
	XR25U250	2500	1764	3179	3546	1025	619	470.5	6/12	2000	2500	2000	2500
	XR25U270	2700	1864	3379	3746	1125	719	470.5	6/12	2000	2500	2000	2500
	XR25U300	3000	2014	3679	4046	1275	869	470.5	6/12	2000	2500	2000	2500
	XR25U330	3300	2164	3979	4346	1425	1019	470.5	6/12	2000	2500	2000	2500
	XR25U360	3600	2314	4279	4646	1575	1169	470.5	6/12	2000	2500	2000	2500
	XR25U400	4000	2564	4679	5046	1825	1419	470.5	6/12	1900	2300	2000	2500
	XR25N400	4000	1964	4739	5046	1285	918	477.5	6/6	1800	2100	1950	2450
	XR25N430	4300	2064	5039	5346	1385	1018	477.5	6/6	1700	2000	1900	2400
Wide view full free triplex mast	XR25N450	4500	2114	5239	5546	1435	1068	477.5	6/6	1600	1900	1800	2300
	XR25N480	4800	2264	5539	5846	1585	1218	477.5	6/6	1500	1700	1700	2100
	XR25N500	5000	2364	5739	6046	1685	1318	477.5	6/6	1400	1600	1600	2000
	XR25N550	5500	2564	6239	6546	1885	1518	477.5	3/6	1050	1200	1500	1800
	XR25N600	6000	2814	6739	7046	2135	1768	477.5	3/6	700	800	1400	1600
	XR25N650	6500	3014	7239	7546	2335	1968	477.5	3/6	/	/	1450	1300
	XR25N700	7000	3264	7764	8046	2500	2218	477.5	3/6	/	/	1300	1200

With sideshifter minus 150Kg,with integral sideshifter minus 100kg.

3.0/3.5/3.8t X series mast:(Pneumatic)

Type	Model	Max. fork height	Overall height						Free lift				Front overhang		Tilt range	Capacity							
			Lowered		Extended		Without backrest		With backrest		Without backrest					With backrest		Load capacity at 500mm					
					Without backrest	With backrest			Without backrest	With backrest			Single tire		Dual tire								
			3t	3.5/3.8t	3t	3.5/3.8t	3t/3.5/3.8t	3t	3.5/3.8t	3t	3.5/3.8t	3t	3.5/3.8t	3t	3.5t	3.8t	kg	kg	kg	kg			
			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	(°)	kg	kg	kg	kg			
Wide view mast	XR30M250	2500	1804	1919	3267	3342	3645	165	170	165	170	475	480	6/12	3000	3500	3800	3000	3500	3800			
	XR30M270	2700	1904	2019	3467	3542	3845	165	170	165	170	475	480	6/12	3000	3500	3800	3000	3500	3800			
	XR30M300	3000	2054	2169	3767	3842	4145	165	170	165	170	475	480	6/12	3000	3500	3800	3000	3500	3800			
	XR30M330	3300	2204	2319	4067	4142	4445	165	170	165	170	475	480	6/12	3000	3500	3800	3000	3500	3800			
	XR30M360	3600	2404	2469	4367	4442	4745	165	170	165	170	475	480	6/12	3000	3500	3800	3000	3500	3800			
	XR30M400	4000	2654	2769	4767	4842	5145	165	170	165	170	475	480	6/6	2850	3250	3550	3000	3500	3700			
	XR30M430	4300	2804	2919	5067	5142	5445	165	170	165	170	475	480	6/6	2700	3000	3200	2900	3400	3600			
	XR30M450	4500	2904	3019	5267	5342	5645	165	170	165	170	475	480	6/6	2550	2850	3100	2850	3350	3550			
	XR30M480	4800	3054	3169	5567	5642	5945	165	170	165	170	475	480	6/6	2250	2450	2800	2550	2950	3150			
	XR30M500	5000	3154	3269	5767	5842	6145	165	170	165	170	475	480	6/6	2100	2300	2600	2400	2800	3100			
Wide view full free duplex mast	XR30M550	5500	3404	3519	6267	6342	6645	165	170	165	170	475	480	3/6	1650	1800	2050	2250	2550	2800			
	XR30M600	6000	3654	3769	6767	6842	7145	165	170	165	170	475	480	3/6	1200	1300	1550	2100	3300	2550			
	XR30U250	2500	1834	1934	3316	3391	3695	1018	1043	689	789	485.5	490.5	6/12	3000	3500	3800	3000	3500	3800			
	XR30U270	2700	1934	2034	3516	3591	3895	1118	1143	789	889	485.5	490.5	6/12	3000	3500	3800	3000	3500	3800			
	XR30U300	3000	2084	2184	3816	3891	4145	1268	1293	939	1039	485.5	490.5	6/12	3000	3500	3800	3000	3500	3800			
	XR30U330	3300	2234	2334	4116	4191	4445	1418	1443	1089	1189	485.5	490.5	6/12	3000	3500	3800	3000	3500	3800			
	XR30U360	3600	2384	2484	4416	4491	4745	1568	1593	1239	1339	485.5	490.5	6/12	3000	3500	3800	3000	3500	3800			
	XR30U400	4000	2634	2734	4816	4891	5145	1818	1843	1489	1589	485.5	490.5	6/12	2850	3250	3550	3000	3500	3700			
	XR30N400	4000	2019	2069	4816	4891	5145	1188	1178	874	924	492.5	497.5	6/6	2700	3000	3200	2900	3400	3600			
	XR30N430	4300	2119	2169	5116	5191	5445	1288	1278	974	1024	492.5	497.5	6/6	2550	2850	3200	2850	3350	3600			
Wide view full free triplex mast	XR30N450	4500	2169	2219	5316	5391	5645	1288	1328	1024	1074	492.5	497.5	6/6	2400	2700	3100	2700	3200	3550			
	XR30N480	4800	2319	2369	5616	5691	5945	1488	1478	1174	1224	492.5	497.5	6/6	2250	2450	2800	2550	2950	3150			
	XR30N500	5000	2419	2469	5816	5891	6145	1588	1578	1274	1324	492.5	497.5	6/6	2100	2300	2600	2400	2800	3100			
	XR30N550	5500	2619	2669	6316	6391	6645	1788	1778	1474	1524	492.5	497.5	3/6	1650	1800	2050	2250	2550	2800			
	XR30N600	6000	2869	2919	6816	6891	7145	2088	2028	1724	1774	492.5	497.5	3/6	1200	1300	1550	2100	3300	2550			
	XR30N650	6500	3069	3169	7316	7391	7645	2288	2278	1924	2024	492.5	497.5	3/6	/	/	/	1950	2050	2300			
	XR30N700	7000	3319	3419	7816	7919	8145	2688	2500	2174	2274	492.5	497.5	3/6	/	/	/	1800	1850	2050			