



DELTA 




Self-Propelled **DELTA V**

14-17 m³

| Precision mixing in tight barns

DELTA V Technical Specifications

A	Specifications	DELTA V 14	DELTA V 16	DELTA V 17
1	Volume [cu. mt.]	14	16	17
2	Max Load [kg]	5600	6400	6800
3	Engine H.P	175		
4	4 Cylinders Engine Manufacturer	Volvo		
5	Overall Length [mm]	7200	7100	7500
6	Overall Height [mm]	2800	3000	3200
7	Overall Width [mm]	2500		
8	Chopper Width [mm]	2000		
9	Chopper Dia. [mm]	600		
10	Chopper Height [mm]	4300		
11	Loading Elevator Belt [mm]	500		
12	Discharge Height [mm]	640		
13	Wheel Dia. [mm]	750/950		
14	Wheel Base [mm]	2915		
15	Steering Radius [mm]	6000		6100
16	Ground Clearance [mm]	330		
17	Rear Steering	Yes		
18	Driving Speed [KPH]	12/25		
19	No. of STD Choper Knives	64		
20	No. of STD Mixer Knives	11		
21	Bin Wall Thickness [mm]	4		
22	Mixer Segment Thickness [mm]	15		
23	Mixer Speed [rpm]	15-44		
24	Elevated Cab.	No		
25	3CR12 Option	Bin, Augers, Chopper, Loader Elevation		

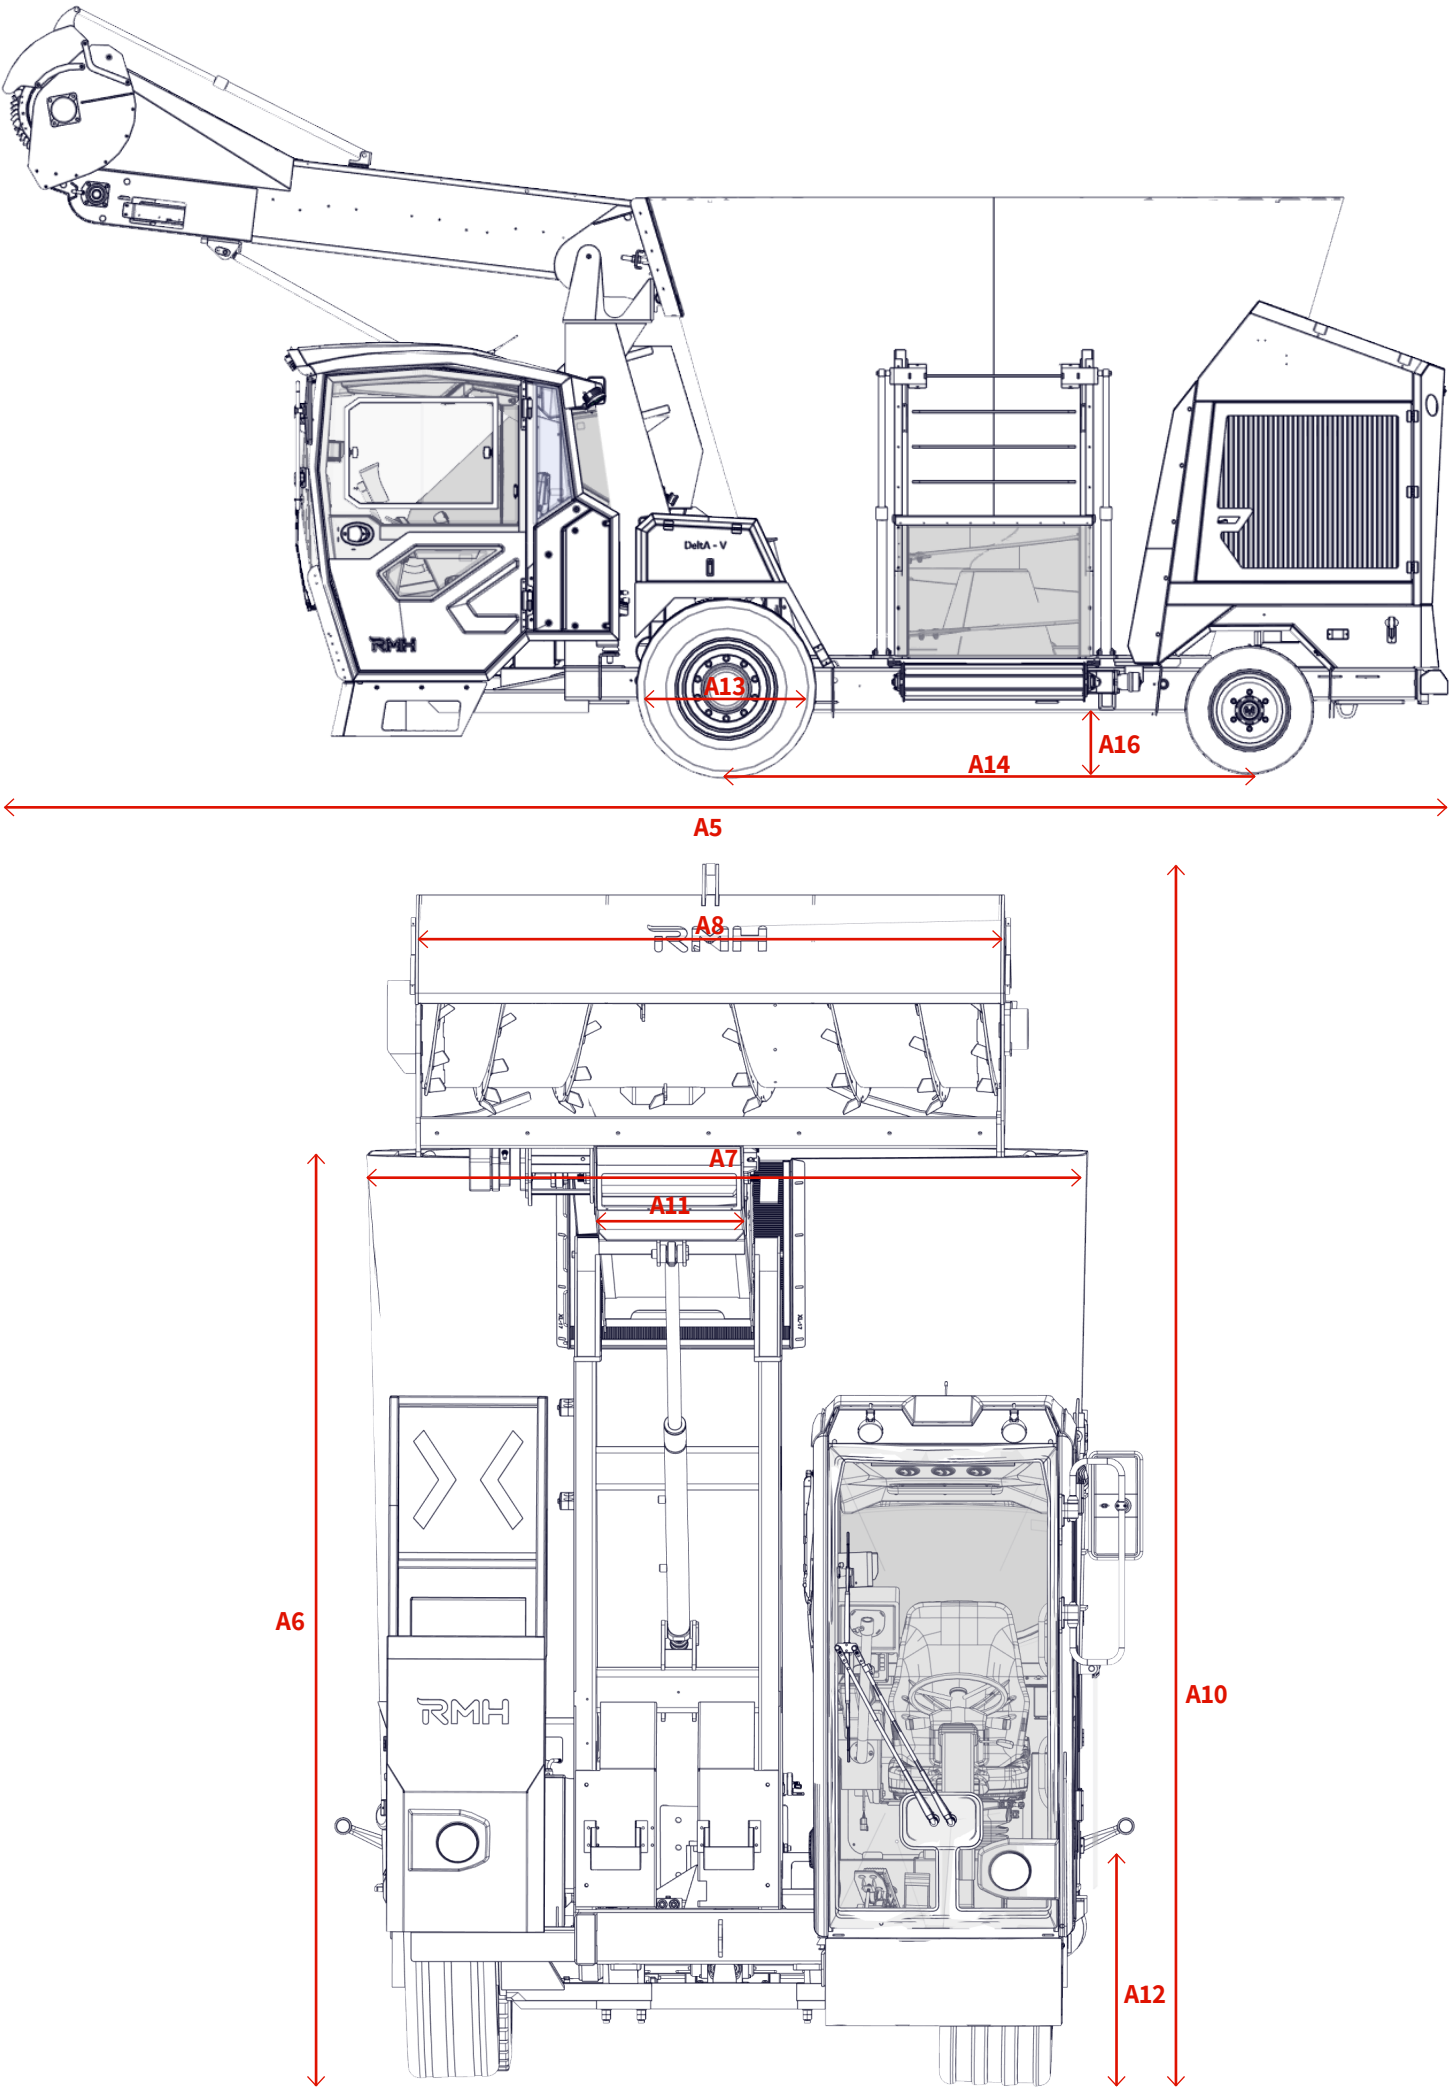



Mixing since 1956



Follow Us

BROdeltav27042026



Tailored to
You



Comfort
Every Day



With You for Life



Profitable by
Design



Peace of Mind

Volume	11	12	13	14	15	16	17	18	19	20	21	22	24	26	28	30	36
Model																	
LIBERTY																	
DELTA V																	
VSL																	
VULCAN																	
PREMIUM																	
TURBOMIX																	
TRIPLE																	

ABOUT RMH

For over 70 years, RMH has led the way in self-propelled mixing technology. Our mission is to provide innovative, efficient, and reliable solutions that help livestock producers feed better, work smarter, and grow stronger.



In the event of any inconsistency between the English version and any translation, the English version shall prevail. Specifications, configurations, and dimensions are subject to change without notice and may vary based on product customization.