



TAURULIFT T 133H



www.ausa.com

AUSA Center, S.L. ● Ctra. de Vic, Km 2.8 - P.O.B. 194. 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 - E-mail: ausa@ausa.com



(Sede central AUSA-Manresa)

- AUSA Madrid** ● Pol. Ind. Coslada - C. Marconi 15-17. 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com
- AUSA France** ● Z. I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com
- AUSA Deutschland** ● Heinrich - Welken Str. 5. 59069 HAMM (GERMANY) Tel.: +49 (0) 2385-9359362 - E-mail: ausa.deutschland@ausa.com
- BEIJING Rep. Office** ● Address Room 527. HengXiang Building, Tuanjieshu Nanli, Chaoyang District. - BEIJING 100026 (CHINA)
Tel.: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com
- AUSA UK** ● Tel.: 07970639988 - E-mail: ausa.uk@ausa.com
- AUSA Brasil** ● Tel.: +55 51 33622111 - E-mail: ausa.brasil@ausa.com
- AUSA México** ● Gustavo Baz, 47. 53489 Naucalpan de Juárez, Edo. de México (MÉXICO) Tel.: +55 2166-9066 - E-mail: ausa.mexico@ausa.com



FEM-AEM




T 133 H

AUSA

www.ausa.com

DIMENSIONS (mm)	T 133 H	T 133 H x4
A	1924	1942
B	263	270
C	1347	1410
D	2919	2982
E	485	485
F	1723	1723
G	383	383
H	143	123
I	1000	1000
J	3591	3591
K	310	310
L	2644	2644
M	748	748

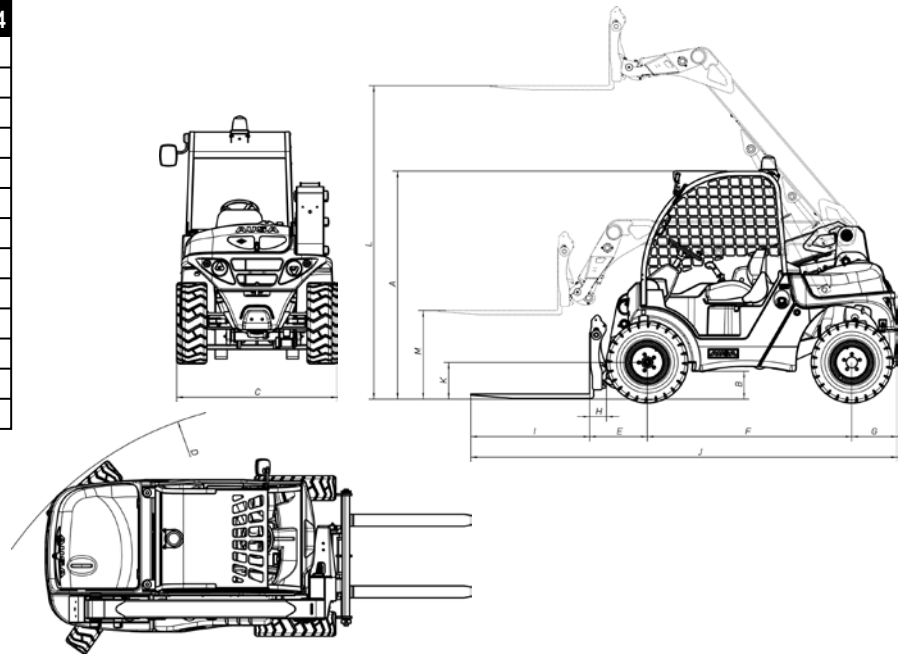

TECHNICAL SPECIFICATIONS

		T 133 H	T 133 H x4
Load capacity	Max. load (Kg)	1300 @ 500 mm	
	Load at max. height (Kg)	1300 @ 500 mm	
Lifting height	Maximum lifting height (mm)	2700 @ 500 mm	
	Lifting height at max. load (mm)	2700 @ 500 mm	
Reach	Max reach (mm)	467	458
	Capacity at max reach (Kg)	1300	
Unload weight (Kg)		2000	2200
Engine	Diesel	Kubota D-1105	
	Power SAE J 1995 (KW / HP)	16.8 / 22.8	
	N° of cylinders	3	
	Cooling system	Water	
Traction		4x2	Permanent 4x4 with hydraulic flow blocking
Transmission		Hydrostatic with variable flow pump automatic regulation patented by AUSA. Electrical inverter in joystick	
Engine starting system		Electric	
Speed (km/h)		20	
Gradeability		31 %	26 %
Hydraulic circuit	Working pressure	240 bar	
	Hydraulic pump	8 cc	
	Flow circuit (l/min)	19.5	
Tyres	Front	7.00 - 12	27x10 - 12
	Rear	7.00 - 12	27x10 - 12
External turning radius (mm)		2919	2982
Steering		Hydraulic	
Tank capacity	Fuel (l)	55	
	Hydraulic fluid (l)	32	
Service brake		Hydrostatic retardation system	
Parking brake		Mechanically applied hydraulically released inside the hydrostatic motor	

STANDARD EQUIPMENT

Homologated "FOPS-ROPS" cabin
Joystick with integrated functions, "total control of movements"
Adjustable ergonomic seat with safety belt
Rear view mirror
Audible reverse warning
Rotating beacon
Antivandalic system
3th auxiliary hydraulic service with quick coupling

OPTIONAL EQUIPMENT

Semi-closed cabin
Closed soundproof cabin with heater
Front protective grille
Load back rest
Electronic anti-theft protection system
Homologated lighting equipment
Working lights
5th auxiliary hydraulic service with quick coupling
4th auxiliary hydraulic service with quick coupling
Other tyres pattern available
FEM II forks carriage with or without integrated side-sift (TDL)
4 en 1 bucket
Bucket (300 l)
Multiple attachments available proven and tested from factory

AUSA reserves the right to make any changes in the specifications without prior notice.