


2.0 / 2.5t R series mast: (pneumatic)


Type	Model	Max. fork height	Overall height				Free lift		Front Overhang	Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	FWD		BWD	Load capacity at 500 mm				
				Without backrest	With backrest						Single tire		Double tire		
		mm	mm	mm	mm	mm	mm	mm	Deg	Deg	2t	2.5t	2t	2.5t	
Wide view mast	R25M250	2500	1735	3125	3545	150	150	475	6	12	2000	2500	2000	2500	
	R25M270	2700	1835	3325	3745	150	150	475	6	12	2000	2500	2000	2500	
	R25M300	3000	1985	3625	4045	150	150	475	6	12	2000	2500	2000	2500	
	R25M330	3300	2135	3925	4345	150	150	475	6	12	2000	2500	2000	2500	
	R25M350	3500	2235	4125	4545	150	150	475	6	12	2000	2500	2000	2500	
	R25M360	3600	2335	4225	4645	150	150	475	6	12	2000	2500	2000	2500	
	R25M400	4000	2585	4625	5045	150	150	475	6	12	1900	2300	2000	2500	
	R25M430	4300	2735	4925	5345	150	150	475	6	6	1800	2100	1950	2450	
	R25M450	4500	2835	5125	5545	150	150	475	6	6	1700	2000	1900	2400	
	R25M480	4800	2985	5425	5845	150	150	475	6	6	1500	1700	1700	2100	
Wide view full free 2-stage mast	R25M500	5000	3085	5625	6045	150	150	475	6	6	1400	1600	1600	2000	
	N25U250	2500	1795	3152	3545	1143	750	470	6	12	2000	2500	2000	2500	
	N25U270	2700	1895	3352	3745	1243	850	470	6	12	2000	2500	2000	2500	
	N25U300	3000	1995	3652	4045	1343	950	470	6	12	2000	2500	2000	2500	
	N25U330	3300	2145	3952	4345	1493	1100	470	6	12	2000	2500	2000	2500	
	N25U360	3600	2295	4252	4645	1643	1250	470	6	12	2000	2500	2000	2500	
	N25U400	4000	2545	4652	5045	1893	1500	470	6	12	1900	2300	2000	2500	
	N25N430	4300	2040	4992	5355	1358	995	485	6	6	1700	2000	1900	2400	
	N25N450	4500	2110	5242	5605	1428	1065	485	6	6	1600	1900	1800	2300	
	N25N480	4800	2210	5492	5855	1528	1165	485	6	6	1500	1700	1700	2100	
Wide view full free 3-stage mast	N25N500	5000	2275	5692	6055	1593	1230	485	6	6	1400	1600	1600	2000	
	N25N550	5500	2440	6192	6555	1758	1395	485	3	6	1050	1200	1500	1800	
	N25N600	6000	2655	6692	7055	1973	1610	485	3	6	700	800	1400	1600	

With sideshifter minus 200Kg, with integral sideshifter minus 100Kg.

LOAD CHART

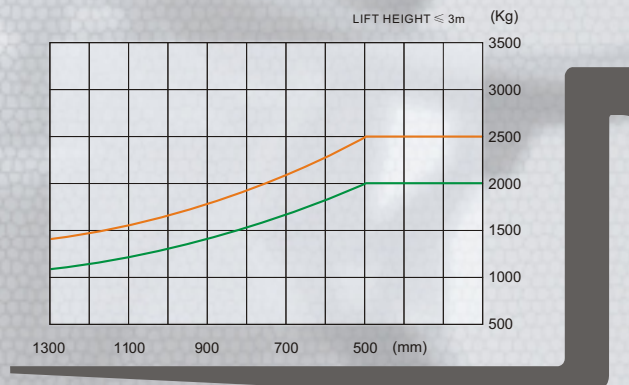

OKAMURA transmission

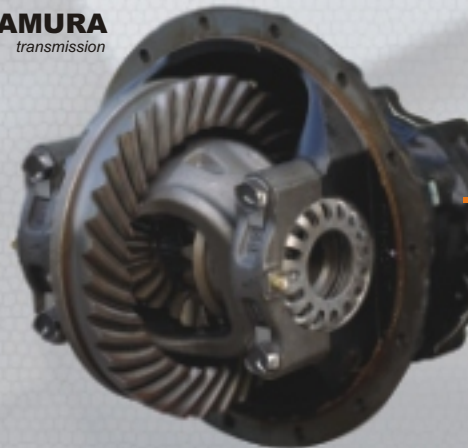

R Series

2.0 / 2.5 T Diesel



OKAMURA New floating type

OKAMURA 2-3t T / M is Floating Types, The only one in China. Floating types are designed to reduce the transmission of vibrations to the chassis in small and mid-sized (1 to 5 tons) forklift trucks, thereby reducing operator fatigue and improving riding comfort. Specially-shortened design is ideal for this floating-type installation. Compact design offers same dimensions as conventional integrated models. May be coupled to the differential axles. Making installation, removal, and maintenance easy.

Options

- 2.0-5.0m duplex mast
- 2.5-4.0m full free duplex mast
- 4.3-6.5m triplex mast
- Special carriage and backrest
- Other dimension forks
- Dual drive wheel with fender
- Solid tyre
- Colored tyre(white、 green)
- Cabin
- Heater and air condition
- Fire extinguisher
- Semi-suspension seat or full-suspension seat
- Dual air cleaner or special air cleaner
- Rear working light
- Customer painting
- Auxiliary hydraulic valve modules
- High-mounted exhaust system
- Middle-mounted exhaust system
- Anti-fire spark exhaust device
- Diesel exhaust gas purifier
- Radiator screen
- Sideshifter
- Integrated sideshifter
- Other attachment



ZHEJIANG HANGCHA ENGINEERING MACHINERY CO.,LTD.
(ZHEJIANG HANGCHA IMP. & EXP. CO.,LTD.)

www.hcforlift.com

Add: 398 Shi Qiao Road. Hangzhou 310022, P.R.China
Tel: +86-571-88135110 88126376 88135220 88125527 88130499(Ext. 8116, 8206, 8200)
Fax: +86-571-88132890 88126379
E-mail: sales@hcforlift.com



CE CERTIFICATE



ISO 14001: 2004



ISO 9001: 2000



2.0 / 2.5 T Diesel



浙江杭叉工程机械股份有限公司
ZHEJIANG HANGCHA ENGINEERING MACHINERY CO.,LTD.