


PFA-T Heavy-duty fork positioners with bar-mounted FEM fork carriers with separate sideshifter

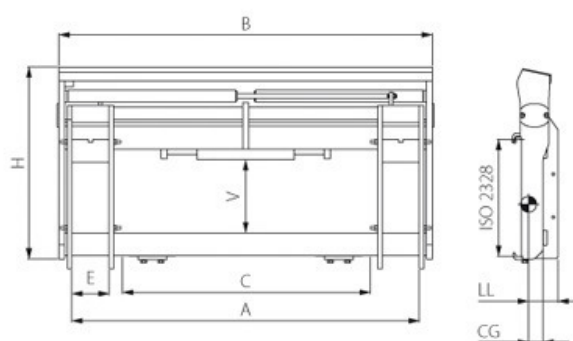

2 hydraulic functions
 Maximum pressure 180 bar
 Recommended oil flow 20 l/min
 C - Minimal width lift truck carriage
 Maximum advised fork length 1600 mm
 Self-lubricating upper sliding bushes
 Technical data without forks
 With chromed rounded upper bars

MODEL	CAPACITY kg/mm	A mm	H mm	C mm	B mm	E mm	V mm	LL mm	CG mm	WEIGHT kg	ISO 2328
PFA 60T.150	6000/600	515/1365	870	1200	1500	200	300	200	95	568	4
PFA 60T.170	6000/600	515/1565	870	1400	1700	200	300	200	95	608	4
PFA 60T.190	6000/600	515/1765	870	1600	1900	200	300	200	95	648	4
PFA 80T.180	8000/600	515/1665	870	1500	1800	200	300	200	95	650	4
PFA 80T.200	8000/600	515/1865	870	1700	2000	200	300	200	95	690	4
PFA 80T.220	8000/600	515/2065	870	1900	2200	200	300	200	95	730	4
PFA120T.220	12000/600	560/2000	870	1900	2200	200	300	260	124	1120	4

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946



AWRE OÜ
Reg. aadress: Pärnumaa
Lemmetsa 88311, Tiidu tee
Reg. nr. 10914764

info@forklift.ee
Tartu: 5090770
Pärnu: 5029762
Tallinn: 53434946