


WA Wide opening fork postioners with FEM fork carriers

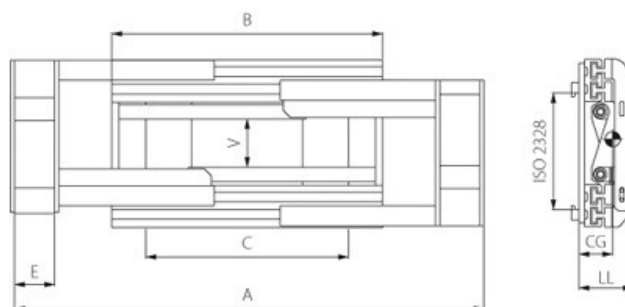

1 hydraulic function
 2 hydraulic functions - Independent arm control
 Quick-release lower mountings, class 2 or class 3
 Quick-release lower mountings, class 4
 Maximum pressure 180 bar
 Recommended oil flow 20 l/min
 Maximum advised fork length 1600 mm
 Without sideshifter

Options:

2 hydraulic functions - Integrated sideshifter
 Separate sideshifter 100+100 for ISO/FEM 2
 Separate sideshifter 100+100 for ISO/FEM 3
 Separate sideshifter 100+100 for ISO/FEM 4

MODEL	CAPACITY kg/mm	A mm	B mm	C mm	V mm	E mm	LL mm	CG mm	WEIGHT kg	ISO 2328
WA16-A0	1600/500	560/1740	950	750	210	130	165	70	242	2
WA16-B0	1600/500	560/1840	1050	750	210	130	165	70	252	2
WA20-A0	2000/500	560/1740	950	750	210	130	165	70	266	2
WA20-B0	2000/500	560/1840	1050	750	210	130	165	70	276	2
WA20-C0	2000/500	560/1940	1150	750	210	130	165	70	286	2
WA23-A0	2300/500	560/1740	950	750	210	130	165	70	269	2
WA23-B0	2300/500	560/1840	1050	750	210	130	165	70	279	2
WA23-C0	2300/500	560/1940	1150	750	210	130	165	70	289	2
WA30-A0	3000/500	560/1840	1050	800	285	150	188	76	294	3
WA30-B0	3000/500	560/1940	1150	900	285	150	188	76	304	3
WA30-C0	3000/500	560/2100	1320	900	285	150	188	76	321	3
WA40-A0	4000/500	560/1940	1150	900	240	150	210	84	442	3
WA40-B0	4000/500	560/2100	1320	1000	240	150	210	84	459	3
WA40-C0	4000/500	560/2400	1600	1050	240	150	210	84	487	3
WA45-A0	4500/500	560/1940	1150	900	240	150	210	86	456	3
WA45-B0	4500/500	560/2100	1320	1000	240	150	210	86	473	3
WA45-C0	4500/500	560/2400	1600	1050	240	150	210	86	501	3
WA55-A0	5500/500	560/2100	1320	1000	330	200	220	96	530	4
WA55-B0	5500/500	560/2400	1600	1050	330	200	220	96	558	4

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946