


**WF-R** Rotating wide opening fork positioners 360°

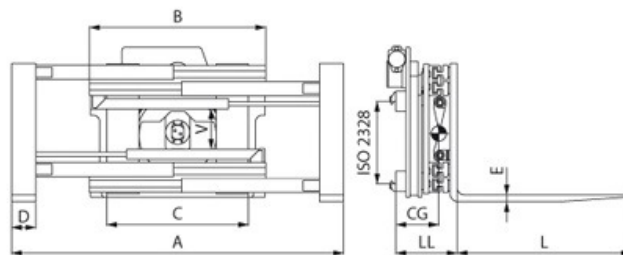

2 hydraulic functions  
 Maximum pressure 180 bar  
 Recommended oil flow 20 l/min  
 Welded forks  
 Without sideshifter

Options:  
 Separate sideshifter 100+100 for ISO/FEM 2  
 Separate sideshifter 100+100 for ISO/FEM 3  
 Quick-release lower mountings, class 2 or class 3

MODEL	FORKS CAPACITY kg/mm	ROTATION CAPACITY kg/mm	A mm	B mm	C mm	FORKS LxDxE	V mm	LL mm	CG mm	WEIGHT kg	ISO 2328
WF16R	1600/500	1200/500	480/1540	950	750	1200x100x40	210	295	255	405	2
WF23R	2300/500	1600/500	480/1540	950	750	1200x120x40	210	300	280	505	2
WF30R	3000/500	2500/500	450/1640	1150	900	1200x120x50	285	320	305	660	3
WF40R	4000/500	2800/500	450/1640	1150	1050	1200x150x50	240	340	320	755	3

AWRE OÜ  
 Reg. address: Pärnumaa  
 Lemmetsa 88311, Tiidu tee  
 Reg. nr. 10914764

info@forklift.ee  
 Tartu: 5090770  
 Pärnu: 5029762  
 Tallinn: 53434946