


107

Doppio traslatore
Twin sideshift
Doppelseitenschieber

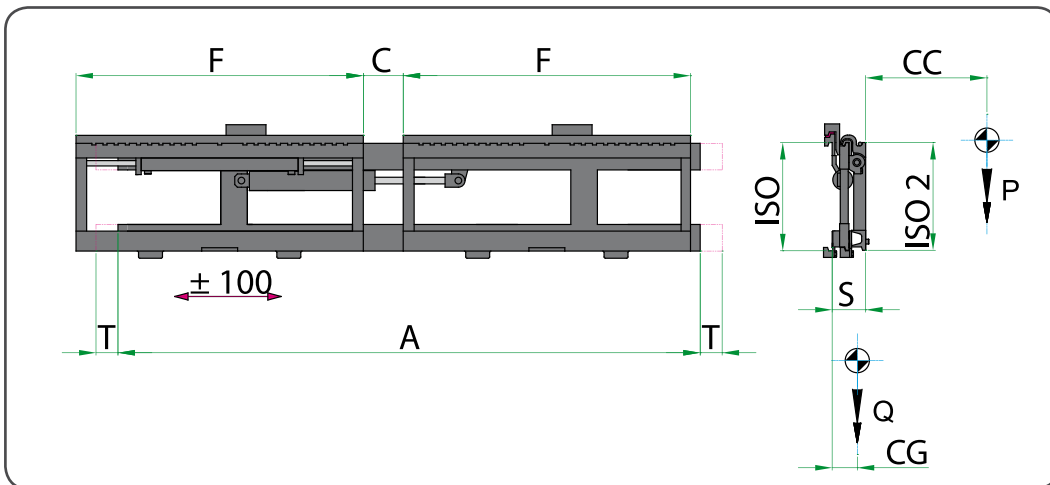

4

RIFERIMENTO	PORTATA ATTREZZATURA	BARICENTRO CARICO	LARGHEZZA PIASTRA	DISTANZA	CORSA	SPESORE	BARICENTRO	PESO			
REFERENCE	ATTACHMENT CAPACITY	LOAD CENTRE	CARRIAGE WIDTH	DISTANCE	STROKE	THICKNESS	CENTER OF GRAVITY	WEIGHT			
ARTIKELNUMMER	TRAGFÄHIGKEIT DES ANBAUGERÄTS	LASTSCHWER- PUNKT	KÖRPERBREITE	ABSTAND	SCHUB	VORBAUMAB	EIGEN- SCHWERPUNKT	GEWICHT			
	P - Kg	CC - mm	A - mm	F - mm	C MIN - mm	C MAX - mm	T - mm	S - mm	CG - mm	Q - Kg	
15GFA2C3001	2500	500	II	1610	800	10	160	100	125	67	234
15GFA2C3002	2500	500	II	1980	980	10	220	100	125	68	276
15GHY7C3002	3500	500	III	1980	980	20	220	100	144	77	382
15GHY7C3003	3500	500	III	2080	980	100	300	100	144	80	390

Funzioni idrauliche richieste: 2.
 Pressione massima di esercizio: 200 bar.
 A richiesta si possono fornire attrezzature con
 caratteristiche diverse da quelle descritte.
 I prezzi esposti non comprendono la fornitura
 delle forche.

Hydraulic functions required: 2.
 Maximum working pressure: 200 bar.
 On request we can supply attachments with dif-
 ferent specifications than those illustrated.
 The forks are not included in the price.

Erforderliche Hydraulikfunktionen: 2.
 Maximaler Betriebsdruck: 200 bar.
 Geräte in Sonderausführung auf Anfrage lie-
 ferbar.
 Die Gabelzinken sind im Preis nicht inbegrif-
 fen.