

HP-T Rotating 90° pivoting fork clamps hand-operated


2 hydraulic functions
 Maximum pressure 180 bar
 Recommended oil flow 25 l/min
 C - Minimal width lift truck carriage
 Models with integrated sideshifter

Options:

For models without sideshifter
 Separate sideshifter 100+100 for ISO/FEM 2
 Separate sideshifter 100+100 for ISO/FEM 3
 2 hydraulic functions - Independent arm control
 Quick-release lower mountings, class 2 or class 3
 Double max pressure control valve

On demand:

Different dimensions of forks available on request
 Black rubber padded forks on request
 Hydraulically actuated fork positioning available on request

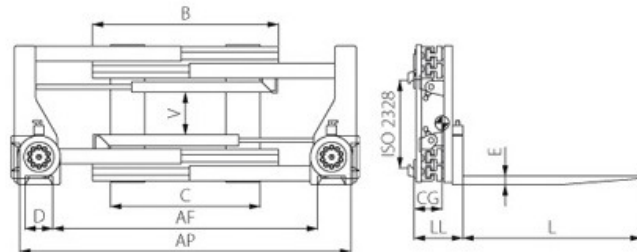

* Model for europallet

MODEL	FORKS CAPACITY kg/mm	CLAMP CAPACITY kg/mm	AF mm	AP mm	B mm	FORKS LxDxE	C mm	V mm	LL mm	CG mm	WEIGHT kg	ISO 2328
HP10-A0T-10*	1400/500	1000/500	360/1600	640/1880	950	1000x100x40	750	195	229	195	372	2
HP10-A0T-12*	1400/500	1000/500	360/1600	640/1880	950	1200x100x40	750	195	229	205	385	2
HP14-A0T-10*	1800/500	1400/500	300/1640	610/1950	1050	1000x130x40	750	195	229	198	401	2
HP14-A0T-12*	1800/500	1400/500	300/1640	610/1950	1050	1200x130x40	750	195	229	208	418	2
HP18-A0T-12*	2300/500	1800/500	220/1440	520/1740	1050	1200x120x50	750	185	232	211	433	2
HP18-B0T-12*	2300/500	1800/500	320/1740	620/2040	1150	1200x120x50	750	185	232	215	454	2
HP22-A0T-12*	2600/500	2200/500	220/1440	520/1740	1050	1200x120x50	750	180	234	213	435	2
HP22-B0T-12*	2600/500	2200/500	320/1740	620/2040	1150	1200x120x50	750	180	234	218	456	2
HP26-A0T-12*	3200/500	2600/500	260/1570	630/1940	1050	1200x150x50	750	175	237	215	470	3
HP26-B0T-12*	3200/500	2600/500	260/1670	630/2040	1150	1200x150x50	750	175	237	220	483	3
HP30-A0T-12*	3500/500	3000/500	160/1460	530/1830	1150	1200x150x50	800	175	271	239	742	3
HP30-B0T-12	3500/500	3000/500	410/1880	780/2250	1250	1200x150x50	850	175	271	235	758	3

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946