


HB-T Bale clamps, pulp bale clamps

Clamps suitable to handle pulp bales too
 2 hydraulic functions
 Maximum pressure 180 bar
 Recommended oil flow 25 l/min
 C - Minimal width lift truck carriage
 Models with integrated sideshifter

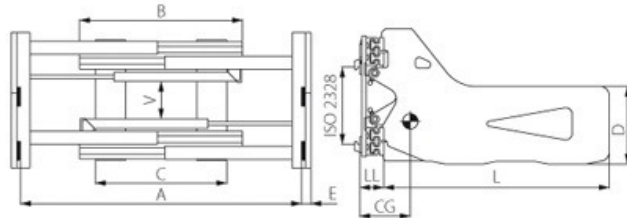

Options:

For models without sideshifter
 Separate sideshifter 100+100 for ISO/FEM 2
 Separate sideshifter 100+100 for ISO/FEM 3
 Separate sideshifter 100+100 for ISO/FEM 4
 2 hydraulic functions - Independent arm control
 Quick-release lower mountings, class 2 or class 3
 Quick-release lower mountings, class 4
 Gripper teeth
 Wear strips under arms
 Wear strips under frame
 Frame bumper

On demand:

Different arm dimensions on request
 Class B mounting arms available on request
 Load backrest available on request
 Waste paper box arm models available on request

MODEL	CAPACITY kg/mm	A mm	B mm	ARMS LxDxE	C mm	V mm	LL mm	CG mm	WEIGHT kg	ISO 2328
HB10-A0T-09	1000/500	450/1590	950	900x400x25	750	195	133	239	369	2
HB10-A0T-10	1000/500	450/1590	950	1000x400x25	750	195	133	289	389	2
HB10-A1T-09	1000/500	550/1790	950	900x400x25	750	195	133	241	375	2
HB10-A1T-10	1000/500	550/1790	950	1000x400x25	750	195	133	291	394	2
HB14-A0T-09	1400/500	550/1790	950	900x400x25	750	195	133	241	384	2
HB14-A0T-10	1400/500	550/1790	950	1000x400x25	750	195	133	290	405	2
HB14-B0T-09	1400/500	450/1690	1050	900x400x25	750	195	133	235	390	2
HB14-B0T-10	1400/500	450/1690	1050	1000x400x25	750	195	133	284	420	2
HB14-C0T-09	1400/500	450/1790	1150	900x400x25	750	195	133	231	410	2
HB14-C0T-10	1400/500	450/1790	1150	1000x400x25	750	195	133	281	430	2
HB14-C1T-09	1400/500	650/2190	1150	900x400x25	750	195	133	232	420	2
HB14-C1T-10	1400/500	650/2190	1150	1000x400x25	750	195	133	282	440	2
HB18-A0T-10	1800/500	560/1780	950	1000x400x30	750	185	135	256	448	2
HB18-A0T-12	1800/500	560/1780	950	1200x400x30	750	185	135	303	475	2
HB18-B0T-10	1800/500	460/1680	1050	1000x400x30	750	185	135	249	460	2
HB18-B0T-12	1800/500	460/1680	1050	1200x400x30	750	185	135	293	485	2
HB18-C0T-10	1800/500	560/1980	1150	1000x400x30	750	185	135	243	473	2
HB18-C0T-12	1800/500	560/1980	1150	1200x400x30	750	185	135	285	508	2
HB18-D0T-10	1800/500	460/1880	1250	1000x400x30	850	185	135	239	491	2
HB18-D0T-12	1800/500	460/1880	1250	1200x400x30	850	185	135	276	517	2
HB22-A0T-10	2200/500	570/1800	950	1000x400x30	750	180	135	249	441	2
HB22-A0T-12	2200/500	570/1800	950	1200x400x30	750	180	135	275	473	2
HB22-B0T-10	2200/500	660/2080	1050	1000x400x30	750	180	135	244	470	2
HB22-B0T-12	2200/500	660/2080	1050	1200x400x30	750	180	135	269	498	2
HB22-C0T-10	2200/500	560/1980	1150	1000x400x30	750	180	135	241	482	2
HB22-C0T-12	2200/500	560/1980	1150	1200x400x30	750	180	135	265	507	2
HB22-D0T-10	2200/500	570/2100	1250	1000x400x30	850	180	135	238	493	2
HB22-D0T-12	2200/500	570/2100	1250	1200x400x30	850	180	135	261	521	2

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946

MODEL	CAPACITY kg/mm	A mm	B mm	ARMS LxDxE	C mm	V mm	LL mm	CG mm	WEIGHT kg	ISO 2328
HB26-A0T-10	2600/500	550/1860	1050	1000x400x30	750	180	137	265	470	2/3
HB26-A0T-12	2600/500	550/1860	1050	1200x400x30	750	180	137	274	492	2/3
HB26-B0T-10	2600/500	670/2200	1150	1000x400x30	750	180	137	259	484	2/3
HB26-B0T-12	2600/500	670/2200	1150	1200x400x30	750	180	137	268	509	2/3
HB26-C0T-10	2600/500	530/2020	1250	1000x400x30	850	180	137	255	497	2/3
HB26-C0T-12	2600/500	530/2020	1250	1200x400x30	850	180	137	263	522	2/3
HB26-D0T-10	2600/500	670/2320	1320	1000x400x30	850	180	137	245	505	2/3
HB26-D0T-12	2600/500	670/2320	1320	1200x400x30	850	180	137	254	530	2/3
HB30-A0T-12	3000/500	610/2070	1150	1200x400x35	850	175	163	306	795	3
HB30-A0T-14	3000/500	610/2070	1150	1400x400x35	850	175	163	348	820	3
HB30-B0T-12	3000/500	510/1970	1250	1200x400x35	850	175	163	299	808	3
HB30-B0T-14	3000/500	510/1970	1250	1400x400x35	850	175	163	341	838	3
HB30-C0T-12	3000/500	640/2300	1320	1200x400x35	850	175	163	294	823	3
HB30-C0T-14	3000/500	640/2300	1320	1400x400x35	850	175	163	334	854	3
HB35-A0T-12	3500/500	430/1730	1150	1200x400x35	900	170	165	308	842	3
HB35-A0T-14	3500/500	430/1730	1150	1400x400x35	900	170	165	351	867	3
HB35-B0T-12	3500/500	690/2420	1320	1200x400x35	1000	170	165	296	852	3
HB35-B0T-14	3500/500	690/2420	1320	1400x400x35	1000	170	165	337	884	3
HB35-C0T-12	3500/500	560/2290	1450	1200x400x35	1000	170	165	291	869	3
HB35-C0T-14	3500/500	560/2290	1450	1400x400x35	1000	170	165	329	897	3
HB42-A0T-12	4200/500	600/2070	1150	1200x450x40	900	165	172	298	931	3
HB42-A0T-14	4200/500	600/2070	1150	1400x450x40	900	165	172	339	965	3
HB42-A0T-16	4200/500	600/2070	1150	1600x450x40	900	165	172	379	992	3
HB42-B0T-12	4200/500	560/2160	1320	1200x450x40	1000	165	172	293	959	3
HB42-B0T-14	4200/500	560/2160	1320	1400x450x40	1000	165	172	331	987	3
HB42-B0T-16	4200/500	560/2160	1320	1600x450x40	1000	165	172	371	1016	3
HB42-C0T-12	4200/500	560/2290	1450	1200x450x40	1050	165	172	287	990	3
HB42-C0T-14	4200/500	560/2290	1450	1400x450x40	1050	165	172	324	1023	3
HB42-C0T-16	4200/500	560/2290	1450	1600x450x40	1050	165	172	365	1059	3
HB45-A0T-12	4500/600	600/2320	1450	1200x450x40	1050	210	180	293	1030	4
HB45-A0T-14	4500/600	600/2320	1450	1400x450x40	1050	210	180	329	1069	4
HB45-A0T-16	4500/600	600/2320	1450	1600x450x40	1050	210	180	361	1110	4
HB45-B0T-12	4500/600	700/2670	1600	1200x450x40	1050	210	180	289	1052	4
HB45-B0T-14	4500/600	700/2670	1600	1400x450x40	1050	210	180	324	1088	4
HB45-B0T-16	4500/600	700/2670	1600	1600x450x40	1050	210	180	356	1129	4
HB60-A0T-14	6000/600	630/2510	1600	1400x500x45	1050	150	245	320	1295	4
HB60-A0T-16	6000/600	630/2510	1600	1600x500x45	1050	150	245	365	1360	4
HB60-B0T-14	6000/600	710/2870	1800	1400x500x45	1050	150	245	313	1330	4
HB60-B0T-16	6000/600	710/2870	1800	1600x500x45	1050	150	245	359	1395	4