


HY Load clamps for foam blocks

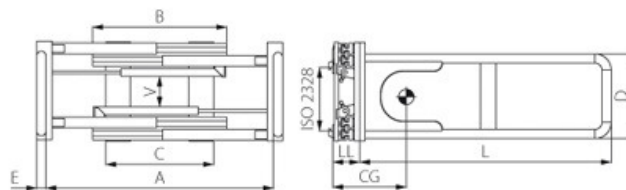

1 hydraulic function
 Maximum pressure 180 bar
 Recommended oil flow 25 U/min
 Minimal width lift truck carriage: 900 mm
 Opening range measured across rear of the arms
 Welded arms
 C - Minimal width lift truck carriage

Options:
 2 hydraulic functions - Integrated sideshifter
 Separate sideshifter 100+100 for ISO/FEM 2
 2 hydraulic functions - Independent arm control
 Quick-release lower mountings, class 2

On demand:
 Different arm dimensions on request
 Bolted arms on request

MODEL	CAPACITY kg/mm	A mm	B mm	ARMS LxDxE	V mm	C mm	LL mm	CG mm	WEIGHT kg	ISO 2328
HY14-A0-18	1400/500	600/2320	1450	1800x500x60	195	900	133	412	527	2
HY20-A0-20	1800/500	630/2300	1450	2000x550x60	185	900	135	431	554	2

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946