


HEF-T Appliance and carton clamps - rigid pads

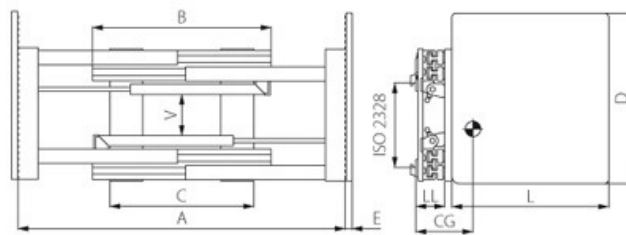

2 hydraulic functions
 Maximum pressure 180 bar
 Recommended oil flow 25 l/min
 Integrated sideshifting
 Welded arms

Options:
 For models without sideshifter
 Separate sideshifter 100+100 for ISO/FEM 2
 2 hydraulic functions - Independent arm control
 Quick-release lower mountings, class 2

On demand:
 Different contact pads on request
 Load backrest available on request

MODEL	CAPACITY kg/mm	A mm	B mm	ARMS LxDxE	V mm	C mm	LL mm	CG mm	WEIGHT kg	ISO 2328
HEF08-A0T-07	800/500	480/1620	950	700x700x25	195	750	140	217	335	2
HEF08-B0T-07	800/500	480/1710	1050	700x700x25	195	750	140	213	349	2
HEF08-A0T-09	800/500	480/1620	950	900x700x25	195	750	140	283	387	2
HEF08-B0T-09	800/500	480/1710	1050	900x700x25	195	750	140	277	405	2

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946