


HX-T Basket clamps with rubber-faced arms

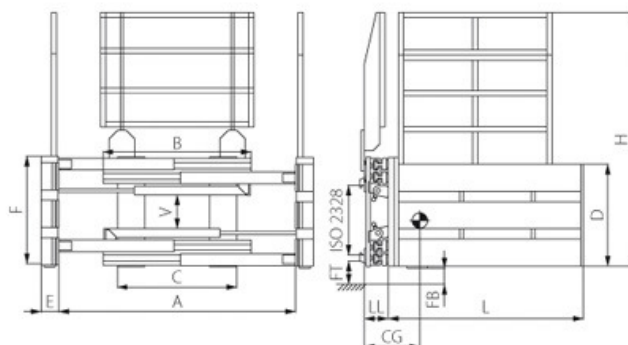

2 hydraulic functions
 Maximum pressure 180 bar
 Recommended oil flow 25 l/min
 Pressure selector valve with pressure gauge included
 Integrated sideshift included
 Load backrest with movable top part
 Welded arms
 C - Minimal width lift truck carriage

Options:
 Separate sideshifter 100+100 for ISO/FEM 2
 2 hydraulic functions - Independent arm control
 Quick-release lower mountings, class 2

On demand:
 Bolted arms on request

MODEL	CAPACITY kg/mm	A mm	B mm	ARMS LxDxE	F mm	H mm	FT mm	FB mm	V mm	C mm	LL mm	CG mm	WEIGHT kg	ISO 2328
HX18T	1800/500	460/1780	1050	1040x600x120	640	From 1500 to 1700	35	15	185	750	135	290	448	2
HX22T	2200/500	420/1840	1150	1060x600x120	640	From 1500 to 1700	35	15	180	750	135	265	465	2

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946