

CR Rotating paper roll clamps 360°


2 hydraulic functions
 Maximum pressure 160 bar
 Recommended oil flow 30 l/min
 LL and CG are in mm with mounting angle 2°
 F - Distance from the ground (+)
 G - Pad protectors encumbrance (++)

Options:

Different contact pads on request
 Models for tissue paper available on request
 180° rotation system available on request

Different pad covers (black rubber, yellow non-marking rubber, plain steel, etc)

* Positionable short arm

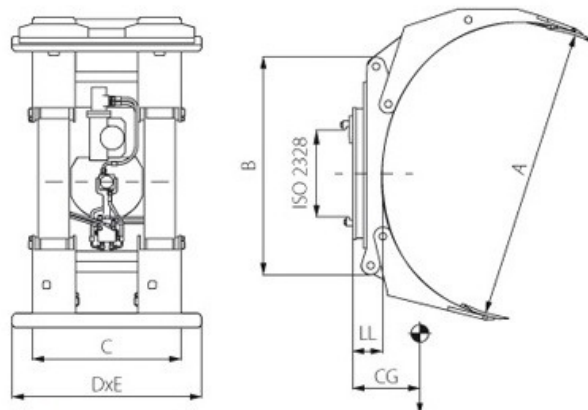

MODEL	CAPACITY kg/mm	ROLL RANGE mm	B mm	C mm	DxE mm	LL mm	CG mm	KG/180° kg	KG/360° kg	ISO 2328	F* mm	G** mm
CR1050*	1000/500	450/1000	990	330	720x250	195	200			2	-	-
CR1355*	1300/550	250/1100	890	690	720x250	205	215		450	2	75	770
CR1165*	1100/650	250/1300	1190	675	720x250	175	225	520	515	2	75	770
CR1265*	1200/650	250/1300	1190	675	720x250	250	265	530	525	2	75	770
CR1266	1200/650	450/1300	1190	675	720x250	250	265	530	525	2	75	770
CR1276	1200/750	450/1500	1190	675	720x250	175	290	510	495	2	75	770
CR1281	1200/800	450/1600	1190	675	720x250	175	295	525	520	2	75	770
CR1655*	1600/550	250/1100	890	690	820x250	205	215			2	75	870
CR1656	1600/550	450/1100	890	690	820x250	205	215			2	75	870
CR1665*	1600/650	250/1300	1190	705	820x250	250	270	550	545	2	85	870
CR1666	1600/650	500/1300	1190	705	820x250	250	270	550	545	2	85	870
CR1680*	1600/800	250/1600	1190	850	820x250	175	305			2/3	155	870
CR1681	1600/800	500/1600	1190	850	820x250	175	305			2/3	155	870
CR2065*	2000/650	250/1300	900	850	820x250	195	260	720	705	2/3	155	870
CR2066	2000/650	500/1300	900	850	820x250	195	260	720	705	2/3	155	870
CR2070*	2000/700	250/1400	900	850	820x250	195	250			2/3	155	870
CR2071	2000/700	500/1400	900	850	820x250	195	250			2/3	155	870
CR2365*	2300/650	250/1300	900	850	1020x250	195	280			2/3	155	1070
CR2366	2300/650	500/1300	900	850	1020x250	195	280			2/3	155	1070

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946

MODEL	CAPACITY kg/mm	ROLL RANGE mm	B mm	C mm	DxE mm	LL mm	CG mm	KG/180° kg	KG/360° kg	ISO 2328	F* mm	G** mm
CR2080*	2000/800	250/1600	1190	850	1020x250	175	325			3	155	1070
CR2081	2000/800	500/1600	1190	850	1020x250	175	325			3	155	1070
CR10105*	1000/1050	650/2100	1300	680	1200x250	190	430	845	830	3	155	1070
CR3065*	3000/650	250/1300	900	934	1020x250	200	260			3/4	175	1070
CR3066	3000/650	450/1300	900	934	1020x250	200	260			3/4	175	1070
CR2580*	2500/800	250/1600	900	934	1020x250	200	330			3/4	175	1070
CR2581	2500/800	500/1600	900	934	1020x250	200	330			3/4	175	1070
CR2390*	2300/900	300/1830	1100	934	1020x250	200	360			3/4	175	1070
CR2391	2300/900	550/1830	1100	934	1020x250	200	360			3/4	175	1070
CR3070*	3000/700	250/1400	900	934	1020x250	200	265			3/4	175	1070
CR3071	3000/700	500/1400	900	934	1020x250	200	265			3/4	175	1070
CR3075*	3000/750	250/1400	900	934	1020x250	200	295	810	795	3/4	175	1070
CR3076	3000/750	500/1400	900	934	1020x250	200	295	810	795	3/4	175	1070
CR3565*	3500/650	250/1300	1100	1041	1200x280	220	305			3/4	175	1250
CR3566	3500/650	500/1300	1100	1041	1200x280	220	305			3/4	175	1250
CR3370*	3300/700	250/1400	1050	1041	1200x280	205	290			3/4	175	1250
CR3371	3300/700	500/1400	1050	1041	1200x280	205	290			3/4	175	1250
CR3375*	3300/750	250/1500	1100	1041	1200x280	215	320			3/4	175	1250
CR3376	3300/750	500/1500	1100	1041	1200x280	215	320			3/4	175	1250
CR3280*	3200/800	250/1600	1100	1041	1200x280	215	320			3/4	175	1250
CR3281	3200/800	500/1600	1100	1041	1200x280	215	320			3/4	175	1250
CR3090*	3000/900	300/1830	1100	1041	1200x280	220	370			3/4	175	1250
CR3091	3000/900	550/1830	1100	1041	1200x280	220	370			3/4	175	1250
CR3580*	3500/800	250/1600	1100	1041	1200x280	215	320			4	175	1250
CR3581	3500/800	500/1600	1100	1041	1200x280	215	320			4	175	1250
CR4565*	4500/650	250/1300	1100	1041	1200x280	220	320			4	175	1250
CR4566	4500/650	500/1300	1100	1041	1200x280	220	320			4	175	1250
CR4275*	4200/750	250/1500	1100	1041	1200x280	215	310			4	175	1250
CR4276	4200/750	500/1500	1100	1041	1200x280	215	310			4	175	1250
CR4080*	4000/800	250/1600	1100	1041	1200x280	215	310			4	175	1250
CR4081	4000/800	500/1600	1100	1041	1200x280	215	310			4	175	1250
CR3890*	3800/900	550/1830	1100	1041	1200x280	230	300			4	175	1250
CR33100*	3300/1100	450/2000	1400	1050	1200x280	210	410	1365	1350	4	175	1250
CR25105*	2500/1050	550-2100	1400	1050	1600x350	210	530	1415	1400	4	175	1650

AWRE OÜ
Reg. address: Pärnumaa
Lemmetsa 88311, Tiidu tee
Reg. nr. 10914764

info@forklift.ee
Tartu: 5090770
Pärnu: 5029762
Tallinn: 53434946