


CT Tippling paper roll clamps

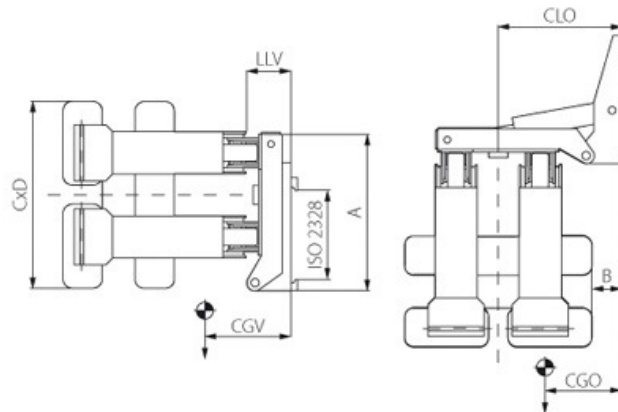

TECHNICAL DETAILS

2 hydraulic functions
 Maximum pressure 160 bar
 Recommended oil flow 30 l/min

Options:

For clamping force and rotating moment see rotating model CR with same capacity
 Different contact pads on request
 Different pad covers (black rubber, yellow non-marking rubber, plain steel, etc)
 Models for tissue paper available on request

* Positionable short arm

MODEL	CAPACITY kg/mm	ROLL mm	TILT FORCE kN.m/140bar	A mm	B mm	CxD mm	CLO mm	CGO mm	LLV mm	CGV mm	WEIGHT kg	ISO 2328
CT 1665*	1600/650	250/1300	16	850	160	1020x250	660	580	254	315	615	2/3
CT 1666	1600/650	450/1300	16	850	160	1020x250	660	580	254	315	610	2/3
CT 2065*	2000/650	250/1300	20	850	180	1020x250	680	590	255	310	685	2/3
CT 2066	2000/650	450/1300	20	850	180	1020x250	680	590	255	310	680	2/3
CT 2565*	2500/650	250/1300	25	980	160	1100x250	700	590	260	335	780	3/4
CT 2566	2500/650	450/1300	25	980	160	1100x250	700	590	260	335	775	3/4
CT 2380*	2500/800	250/1600	27.5	1000	180	1100x250	730	605	256	370	835	3/4
CT 3065*	3000/650	250/1300	36	1050	200	1200x250	760	640	290	330	920	4
CT 3081	3000/800	450/1600	36	1200	200	1200x280	760	690	290	330	1040	4
CT 3580*	3500/800	250/1600	42	1200	180	1200x280	780	700	320	390	1170	4

AWRE OÜ
 Reg. address: Pärnumaa
 Lemmetsa 88311, Tiidu tee
 Reg. nr. 10914764

info@forklift.ee
 Tartu: 5090770
 Pärnu: 5029762
 Tallinn: 53434946