



ENERGY GENERATION

## GS/P INOX 25S4 1185X555

INTELLIGENT WEIGHING SYSTEM



## SCALE TRUCKS GS/P - PX20

The Lifter scale truck series is available in two models, both of which are equipped with an intelligent weighing device with numerous options. It is suitable for lifting and carrying heavy loads; it is therefore very precise and functional in all internal weighing operations.

### DISPLAY

The PX20 pallet truck is a simple, economical and robust tool to be used for the weighing of transported loads. Its large-sized LCD display allows for easy reading of weight and the setting of tare simply and immediately.

### GS/P 25 INOX

GS/P differs from PX20 due to its hydraulic unit of higher load capacity (2,500 kg) and the bigger number of functions, such as the items counter and the load totalization indicator. The pallet truck may also be equipped with a thermal printer, memory card SD or may be provided in the INOX version.

### FRAME STRUCTURE

The structure is made up of a double frame and a lower fork on which a counter fork is placed; both forks house four load cells that allow for a uniform load distribution, thus keeping weighing precision even in case of collision and unbalanced load.

### MEMORY CARD SD

GS/P pallet truck is available with printing on SD memory card and certified weighing.



### Description

1.1 Manufacturer	LIFTER		
1.3 Drive (Manual/Electric)	Type	MANUAL	
1.4 Operator type (Pedestrian/Standing)	Type	PEDESTRIAN	
1.5 Load capacity	Q	Kg	2500
1.6 Load centre distance	c	mm	600
1.8 Load distance, center or drive axle to fork	x	mm	975
1.9 Wheel base	y	mm	1255

### Weights

2.1 Service weight	Kg	117
2.2 Axle load, laden rear	Kg	1834
2.2 Axle load, laden front	Kg	783
2.3 Axle load, unladen front	Kg	73
2.3 Axle load, unladen rear	Kg	44

**Tyres/Chassis**

3.1 Tyres: Steering wheels	Type	NYLON EXTRA
3.1 Tyres: Load rollers	Type	NYLON EXTRA
3.2 Tyre size: Steering wheels	Width	mm 50
3.2 Tyre size: Steering wheels	Diameter	mm 200
3.3 Tyre size: rear wheels	Diameter	mm 82
3.3 Tyre size: rear wheels	Width	mm 60
3.5 Wheels, number: rear	Q.ty	nr 4
3.5 Rear balancing axle		No
3.6 Tread, front	b10	mm 155
3.7 Tread, rear	b11	mm 375

**Dimensions**



4.4 Lift height	h3	mm 115
4.9 Height of tiller in drive position min/max	h14	mm 1160
4.15 Height, lowered	h13	mm 90
4.19 Overall length	l1	mm 1600
4.20 Length to face of forks	l2	mm 415
4.21 Overall width	b1	mm 555
4.22 Fork dimensions (thickness, width, length	s	mm 60
4.22 Fork width	e	mm 180
4.22 Fork length	l	mm 1185
4.25 Distance between fork arms	b5	mm 555
4.32 Ground clearance, centre of wheelbase	m2	mm 30
4.34 Aisle width	Ast	mm 1815
4.35 Turning radius	Wa	mm 1390

**Performance data**

5.2 Lifting speed laden	strokes	13
5.2 Lifting speed unladen	strokes	13

**Scale**

Display Type	DFW 06
Display Digits	Q.ty 6
Functions Digit height	mm 25
Functions Kilograms	Yes
Functions Lbs	Yes
Functions Tare	Yes
Functions Auto-off	Yes
Functions Totalization	Yes
Functions Counting	Yes
Miscellaneous Operating time	h 50
Miscellaneous Accuracy	% 0.05
Miscellaneous Shear-beam load cells	Q.ty 4
Miscellaneous Division	Kg 0.5
6.4 Battery voltage	V 6
6.4 Battery capacity	Ah 4

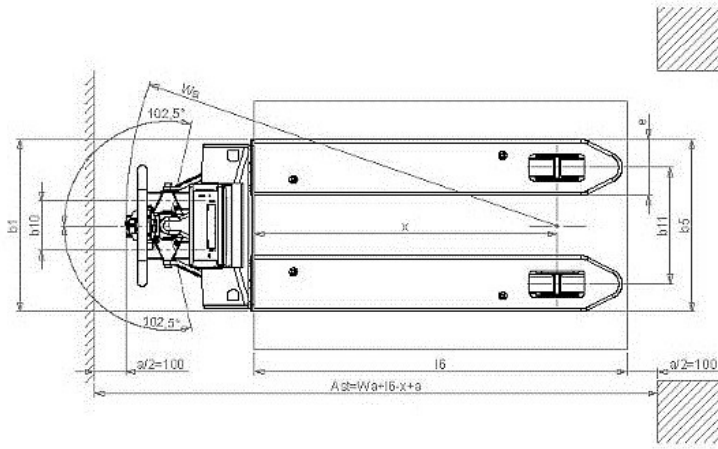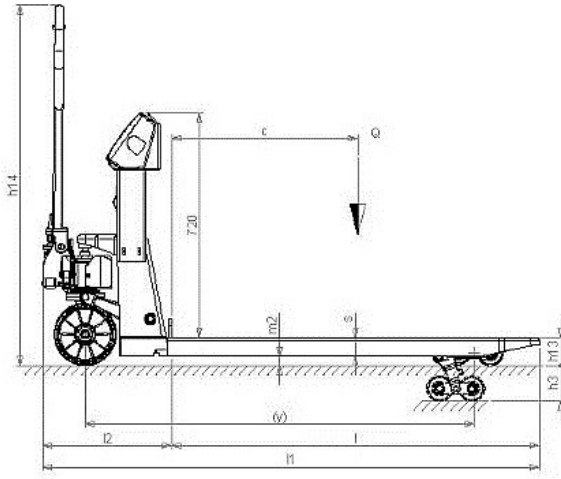

Printed on 18/02/2015 (ID 628)

©2012 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).